




www.zc-rubber.com




zc rubber

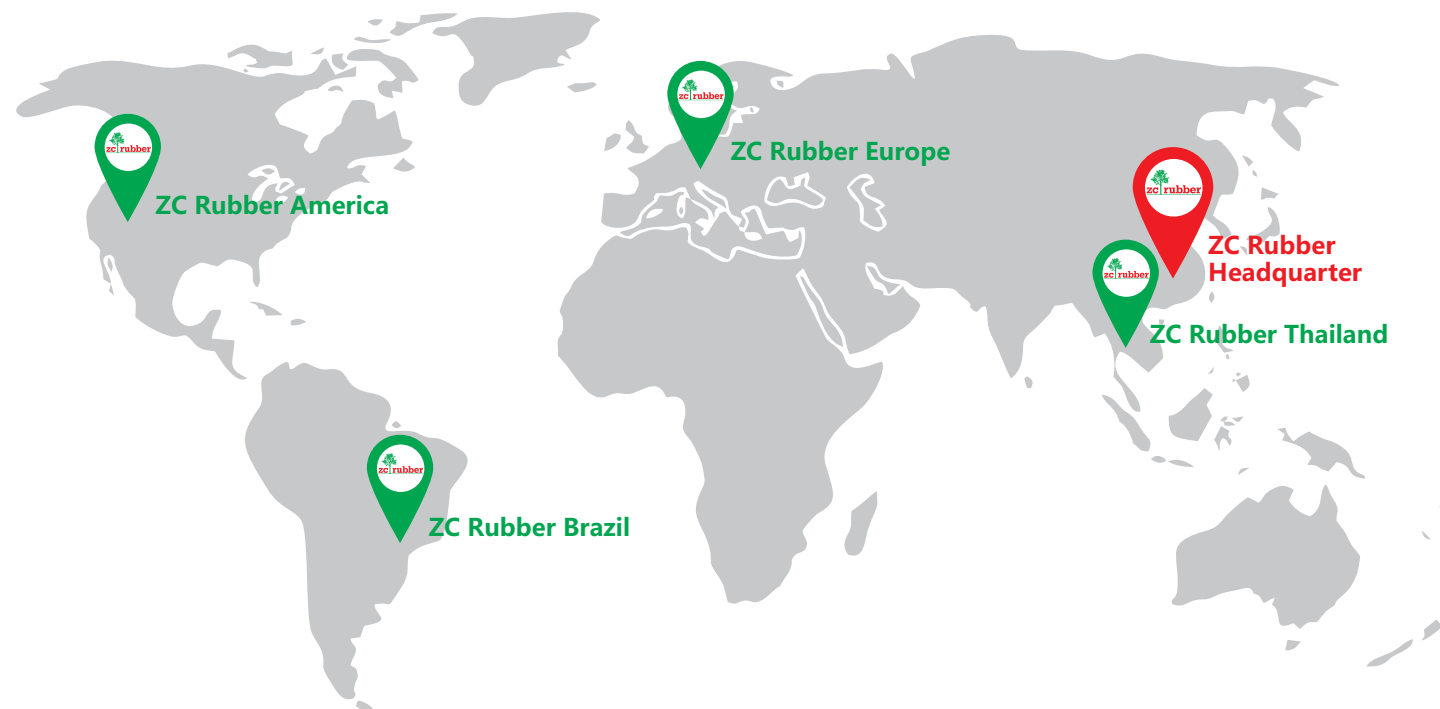

zc rubber



ZHONGCE RUBBER GROUP CO., LTD.



Version 3 Printed in China



2020 TYRE CATALOGUE

Passenger Car, SUV and Light Truck





- A Company Established in Year 1958
- No. 1 Tyre Manufacturer in China
- No. 9 of Top 75 Global Tyre Manufacturers in Year 2019
- Sale revenue reached USD3.996 billion in Year 2018

Zhongce Rubber Group Co., Ltd. (ZC-RUBBER) takes great pride in producing tyres that rate among the best in the world. Our corporate philosophy is all about collaboration with our suppliers, with over 10,000s of companies who sell our products around the world, and with our millions of end customers who trust our tyres every single day.

Our engineers are working together closely with our international Research and Development (R&D) team combined of Japanese and Korean experts. We keep on investing millions of US dollars in establishing various production and testing facilities. Meanwhile the quality control system approved by global tyre manufacturers and


international vehicle manufacturers will guarantee the safety and quality of ZC-Rubber tyres.

Today ZC-Rubber is expanding from a Chinese oriented company to a global tyre manufacturer. The subsidiaries located in Southeast Asia, North America, South America and Europe (coming soon) are serving customers without any difference of time and language. The newly established Thailand plant will produce suitable products for local and nearby markets. Safe and value will be the key supplied by ZC-Rubber, who will craft a better future together with partners and friends all over the world.

Manufacturing Bases




Advanced Production Facility

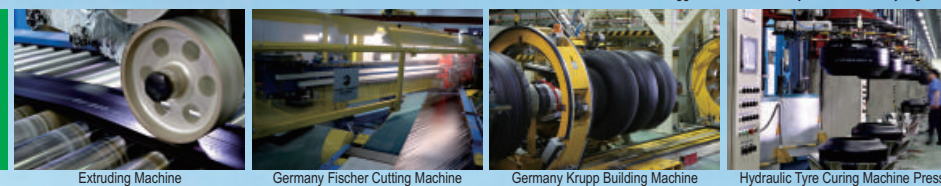

Strict Quality Inspection



R&D Center

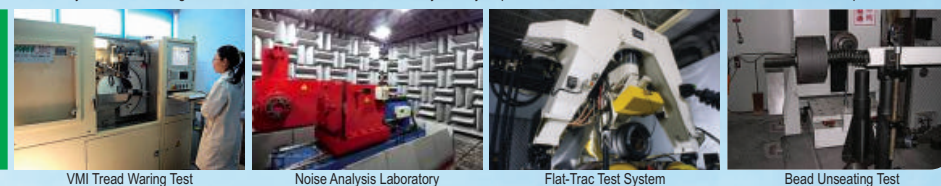

Contents

ULTRA HIGH PERFORMANCE 05-09
SA-37 SPORT RS SA-07 SA-57

PASSENGER 10-15
RP18 RP28 RP08 RP88 RP26 RP36

SUV / LTR 16-25
SU318 SU317 SV308 SL369 SU327 SL366 SL376 SL386 SL309

COMMERCIAL LTR 26-30
SC328 H188 SC326 ST303 ST313

WINTER 31-38
CR857+ SW658 SW618 Z-507 SW608 SW612 Z-506 SW606

ATTACHMENT 39-42



M+S

RIM SIZE	15 - 24
SERIES	30 - 65
SPEED RATING	H - Y



Benefits and Features

- New generation of asymmetric ultra high performance tyre for summer
- SILICA TECH compound helps to enhance wet grip providing shorter braking distance
- Strong center rib guarantees excellent handling on both wet and dry roads and on-center feel

SPORT SA-37

Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	UTQG
195/45R15	78V	6.5J	195	557	425	300	280 AA A
195/50R15	82V	6.0J	201	577	475	300	280 AA A
185/65R15	88H	5.5J	189	621	560	300	280 AA A
195/65R15	91V	6.0J	201	635	615	300	280 AA A
195/45R16 XL	84V	6.5J	195	582	500	350	280 AA A
205/45ZR16 XL	87W	7.0J	206	590	545	350	280 AA A
195/50R16	84V	6.0J	201	602	500	300	280 AA A
205/50R16	87W	6.5J	214	612	545	300	280 AA A
225/50R16	92W	7.0J	233	632	630	300	280 AA A
205/55R16	91V	6.5J	214	632	615	300	280 AA A
205/55R16	91V	6.5J	214	632	615	300	280 AA A ZRT
205/55R16 XL	94W	6.5J	214	632	670	350	280 AA A
215/55R16	93V	7.0J	226	642	650	300	280 AA A
225/55R16 XL	99W	7.0J	233	654	775	350	280 AA A
225/55R16 XL	99W	7.0J	233	654	775	350	280 AA A ZRT
185/35R17	74V	6.5J	188	562	375	350	280 AA A
165/40R17	72V	6.0J	170	564	355	300	280 AA A
195/40ZR17 XL	81W	7.0J	200	588	462	350	280 AA A
205/40ZR17 XL	84W	7.5J	212	596	500	350	280 AA A
215/40ZR17 XL	87W	7.5J	218	604	545	350	280 AA A
245/40ZR17 XL	95Y	8.5J	248	628	690	350	280 AA A
205/45ZR17 XL	88W	7.0J	206	616	560	350	280 AA A
215/45ZR17 XL	91W	7.0J	213	626	615	350	280 AA A
225/45ZR17 XL	94W	7.5J	225	634	670	350	280 AA A
225/45R17 XL	94W	7.5J	225	634	670	350	280 AA A ZRT
235/45ZR17 XL	97W	8.0J	236	644	730	350	280 AA A
245/45ZR17 XL	99W	8.0J	243	652	775	350	280 AA A
255/45ZR17 XL	102W	8.5J	255	662	850	350	280 AA A
205/50R17 XL	93W	6.5J	214	638	650	350	280 AA A
215/50R17 XL	95W	7.0J	226	648	690	350	280 AA A
225/50R17 XL	98W	7.0J	233	658	750	350	280 AA A
225/50R17 XL	98W	7.0J	233	658	750	350	280 AA A ZRT
235/50R17	96V	7.5J	245	668	710	300	280 AA A
205/55R17 XL	95W	6.5J	214	658	690	350	280 AA A
215/55R17 XL	98W	7.0J	226	668	750	350	280 AA A
225/55R17 XL	101W	7.0J	233	680	825	350	280 AA A
225/55R17 XL	101W	7.0J	233	680	825	350	280 AA A ZRT
235/55R17 XL	103W	7.5J	245	690	875	350	280 AA A
165/35R18	69V	6.0J	170	573	325	350	280 AA A
215/35ZR18 XL	84W	7.5J	218	607	500	350	280 AA A
225/35ZR18 XL	87Y	8.0J	230	615	545	350	280 AA A
245/35ZR18 XL	92W	8.5J	248	629	630	350	280 AA A
265/35ZR18 XL	97Y	9.5J	271	643	730	350	280 AA A
165/40R18	73V	6.0J	170	589	365	350	280 AA A
215/40ZR18 XL	89W	7.5J	218	629	580	350	280 AA A
225/40ZR18 XL	92W	8.0J	230	637	630	350	280 AA A
235/40ZR18 XL	95W	8.5J	241	645	690	350	280 AA A
245/40ZR18 XL	97Y	8.5J	248	653	730	350	280 AA A
245/40R18 XL	97W	8.5J	248	653	730	350	280 AA A ZRT
255/40ZR18 XL	99Y	9.0J	260	661	775	350	280 AA A
255/40ZR18 XL	99Y	9.0J	260	661	775	350	280 AA A ZRT
215/45ZR18 XL	93W	7.0J	213	651	650	350	280 AA A
225/45ZR18 XL	95W	7.5J	225	659	690	350	280 AA A
225/45R18 XL	95W	7.5J	225	659	690	350	280 AA A ZRT
235/45ZR18	94W	8.0J	236	669	670	300	280 AA A
245/45ZR18 XL	100W	8.0J	243	677	800	350	280 AA A
245/45R18	96W	8.0J	243	677	710	350	280 AA A ZRT

Made in Thailand
 Made in China
 ZC Rubber RunFlat Tyres


SPORT SA-37

Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	UTQG
255/45ZR18	99W	8.5J	255	687	775	300	280 AA A
225/50R18	95W	7.0J	233	683	690	300	280 AA A
235/50R18 XL	101V	7.5J	245	693	825	350	280 AA A
245/50R18	100W	7.5J	253	703	800	300	280 AA A
245/50R18	100W	7.5J	253	703	800	300	280 AA A ZRT
215/55R18 XL	99V	7.0J	226	693	775	350	280 AA A
255/55R18 XL	109V	8.0J	265	737	1030	350	280 AA A
255/55R18 XL	109V	8.0J	265	737	1030	350	280 AA A ZRT
265/60R18	110V	8.0J	272	775	1060	300	280 AA A
265/30ZR19 XL	93Y	9.5J	271	643	650	350	280 AA A
275/30ZR19 XL	96W	9.5J	278	649	710	250	280 AA A
235/35ZR19 XL	91Y	8.5J	241	647	615	350	280 AA A
245/35ZR19 XL	93Y	8.5J	248	655	650	350	280 AA A
255/35ZR19 XL	96Y	9.0J	260	661	710	350	280 AA A
275/35ZR19 XL	100W	9.5J	278	675	800	350	280 AA A
275/35ZR19 XL	100W	9.5J	278	675	800	350	280 AA A ZRT
225/40ZR19 XL	93Y	8.0J	230	663	650	350	280 AA A
235/40ZR19	96Y	8.5J	241	671	710	350	280 AA A
245/40ZR19 XL	98Y	8.5J	248	679	750	350	280 AA A
245/40ZR19	94Y	8.5J	248	679	670	300	280 AA A ZRT
255/40ZR19 XL	100Y	9.0J	260	687	800	350	280 AA A
275/40R19	101W	9.5J	278	703	825	300	280 AA A ZRT
225/45ZR19 XL	96W	7.5J	225	685	710	350	280 AA A
245/45ZR19	98Y	8.0J	243	703	750	300	280 AA A
245/45ZR19	98Y	8.0J	243	703	750	300	280 AA A ZRT
255/45ZR19 XL	104Y	8.5J	255	713	900	350	280 AA A
235/50R19	99W	7.5J	245	719	775	300	280 AA A
255/50R19	107W	8.0J	265	739	975	350	280 AA A ZRT
225/30ZR20 XL	85W	8.0J	230	644	515	350	280 AA A
275/30ZR20 XL	97Y	9.5J	278	674	730	350	280 AA A
225/35ZR20 XL	90W	8.0J	230	666	600	350	280 AA A
245/35ZR20 XL	95Y	8.5J	248	680	690	350	280 AA A
255/35ZR20 XL	97W	9.0J	260	686	730	350	280 AA A
275/35ZR20 XL	102W	9.5J	278	700	850	350	280 AA A
245/40ZR20 XL	99W	8.5J	248	704	775	350	280 AA A
245/45ZR20	99W	8.0J	243	728	775	300	280 AA A
255/45ZR20 XL	105W	8.5J	255	748	925	350	280 AA A
255/45ZR20 XL	105W	8.5J	255	748	925	350	280 AA A ZRT
265/45ZR20 XL	108W	9.0J	266	746	1000	350	280 AA A
245/50R20	102W	7.5J	253	754	850	300	280 AA A
265/50R20 XL	111W	8.5J	277	774	1090	350	280 AA A
275/50R20 XL	113W	8.5J	284	784	1150	350	280 AA A
235/55R20 XL	105W	7.5J	245	766	925	350	280 AA A
255/55R20 XL	110W	8.0J	265	788	1060	350	280 AA A
295/35ZR21 XL	107Y	10.5J	301	739	975	350	280 AA A
265/40ZR21 XL	105W	9.5J	271	745	925	350	280 AA A
295/40ZR21	111W	10.5	301	769	1090	350	280 AA A
315/40ZR21	111Y	11.0J	320	785	1090	300	280 AA A
265/45ZR21	104W	9.0J	266	771	900	300	280 AA A
275/45ZR21 XL	110Y	9.0J	273	781	1060	350	280 AA A
235/30ZR22 XL	90W	8.5J	241	701	600	350	280 AA A
245/30ZR22 XL	92W	8.5J	248	707	630	350	280 AA A
285/45R22 XL	114V	9.5J	285	815	1180	350	280 AA A
275/25ZR24 XL	96W	10.0J	283	748	710	350	280 AA A
255/30ZR24 XL	97W	9.0J	260	764	730	350	280 AA A
305/35R24 XL	112V	11.0J	313	824	1120	350	280 AA A

Made in Thailand
 Made in China
 ZC Rubber RunFlat Tyres



ZC Rubber RunFlat Tyres (ZRT)

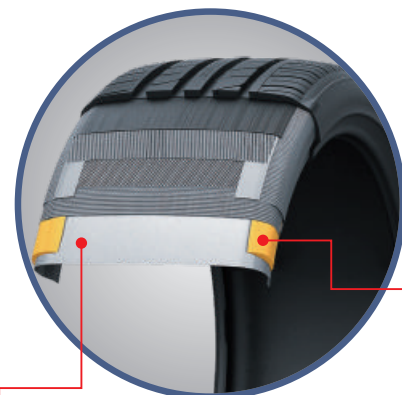

SPECIAL REINFORCED SIDEWALL CONSTRUCTION

Supporting the tyres even if the air pressure dropped to zero


ADVANCED CARCASS STRUCTURE

Enhance the tyre body and avoid possible tyre failure during low pressure driving



M+S

RIM SIZE	15 - 20
SERIES	30 - 50
SPEED RATING	V - W



Benefits and Features

- Ideal drifting tyre with special design and components based on competition experiences
- Asymmetric tread design with big pattern blocks and special compound provides superior grip ability
- Continuous center rib generates better grip in dry conditions and enhances high-speed stability

SPORT RS

Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	UTQG
195/50R15	82V	6.0J	201	577	475	475	240 AA A
205/50R15 XL	89V	6.5J	214	587	580	580	240 AA A
205/45ZR16 XL	87W	7.0J	206	590	545	545	240 AA A
225/50R16 XL	96W	7.0J	233	632	710	710	240 AA A
235/40ZR17	90W	8.5J	241	620	600	600	240 AA A
245/40ZR17 XL	95W	8.5J	248	628	690	690	240 AA A
215/45ZR17	87W	7.0J	213	626	545	545	240 AA A
225/45ZR17 XL	94W	7.5J	225	634	670	670	240 AA A
235/45ZR17	94W	8.0J	236	644	670	670	240 AA A
265/35ZR18 XL	97W	9.5J	271	643	730	730	240 AA A
285/35ZR18 XL	101W	10.0J	290	657	825	825	240 AA A
225/40ZR18 XL	92W	8.0J	230	637	630	630	240 AA A
235/40ZR18 XL	95W	8.5J	241	645	690	690	240 AA A
275/30ZR19 XL	96W	9.5J	278	649	710	710	240 AA A
235/35ZR19 XL	91W	8.5J	241	647	615	615	240 AA A
285/35ZR19 XL	103W	10.0J	290	683	875	875	240 AA A
285/35ZR20 XL	104W	10.0J	290	708	900	900	240 AA A
255/40ZR20 XL	101W	9.0J	260	712	825	825	240 AA A

• Made in China



SA-07


Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	UTQG
195/45R16 XL	84V	6.5J	195	582	500	350	460 A A
225/50R16	92W	7.0J	233	632	630	300	460 A A
205/55R16	91V	6.5J	214	632	615	300	460 A A
215/55R16	93V	7.0J	226	642	650	300	460 A A
225/55R16	95W	7.0J	233	654	690	300	460 A A
205/40ZR17 XL	84W	7.5J	212	596	500	350	460 A A
215/40ZR17 XL	87W	7.5J	218	604	545	350	460 A A
245/40ZR17 XL	95W	8.5J	248	628	690	350	460 A A
205/45ZR17 XL	88W	7.0J	206	616	560	350	460 A A
215/45ZR17 XL	91W	7.0J	213	626	615	350	460 A A
225/45ZR17 XL	94W	7.5J	225	634	670	350	460 A A
235/45ZR17 XL	97W	8.0J	236	644	730	350	460 A A
245/45ZR17	95Y	8.0J	243	652	690	300	460 A A
255/45ZR17	98W	8.5J	255	662	750	300	460 A A
205/50R17	89W	6.5J	214	638	580	300	460 A A
215/50R17	91W	7.0J	226	648	615	300	460 A A
225/50R17	94W	7.0J	233	658	670	300	460 A A
235/50R17 XL	100W	7.5J	245	668	800	350	460 A A
245/50R17	99V	7.5J	253	678	775	300	460 A A
215/55R17	94V	7.0J	226	668	670	300	460 A A
225/55R17	97W	7.0J	233	680	730	300	460 A A
235/55R17	99W	7.5J	245	690	775	300	460 A A
215/35ZR18 XL	84W	7.5J	218	607	500	350	460 A A
215/40ZR18 XL	89W	7.5J	218	629	580	350	460 A A
225/40ZR18 XL	92W	8.0J	230	637	630	350	460 A A
235/40ZR18 XL	95W	8.5J	241	645	690	350	460 A A
245/40ZR18 XL	97Y	8.5J	248	653	730	350	460 A A
215/45ZR18	89W	7.0J	213	651	580	300	460 A A
225/45ZR18 XL	95W	7.5J	225	659	690	350	460 A A
235/45ZR18	94Y	8.0J	236	669	670	300	460 A A
245/45ZR18	96Y	8.0J	243	677	710	300	460 A A
225/50R18	95V	7.0J	233	683	690	300	460 A A
235/50R18 XL	101W	7.5J	245	693	825	350	460 A A
245/50R18	100Y	7.5J	253	703	800	300	460 A A
215/55R18 XL	99V	7.0J	226	693	775	350	460 A A
225/55R18	98V	7.0J	233	705	750	300	460 A A
245/55R18	103W	7.5J	253	727	875	300	460 A A
235/35ZR19 XL	91W	8.5J	241	647	615	350	460 A A
245/35ZR19 XL	93W	8.5J	248	655	650	350	460 A A
255/35ZR19 XL	96W	9.0J	260	661	710	350	460 A A
225/40ZR19 XL	93W	8.0J	230	663	650	350	460 A A
235/40ZR19 XL	96W	8.5J	241	671	710	350	460 A A
245/40ZR19	94Y	8.5J	248	679	670	300	460 A A
255/40ZR19 XL	100W	9.0J	260	687	800	350	460 A A
275/40R19	101V	9.5J	278	703	825	300	460 A A
245/45R19	98V	8.0J	243	703	750	300	460 A A
255/45R19	100V	8.5J	255	713	800	300	460 A A
245/35ZR20 XL	95W	8.5J	248	680	690	350	460 A A
245/45ZR20	99W	8.0J	243	728	775	300	460 A A
255/45ZR20 XL	105W	8.5J	255	738	925	350	460 A A
265/50R20 XL	111V	8.5J	277	774	1090	350	460 A A

• Made in Thailand

• Made in China

M+S

RIM SIZE	16 - 20
SERIES	35 - 55
SPEED RATING	V - Y



Benefits and Features

- Premium performance tyres for sedans and race cars
- SILICA TECH was adopted for low rolling resistance and precise control
- RIM PROTECTOR protects the wheel rim and provides superior handling control and enhanced cornering



M+S

RIM SIZE	14 - 24
SERIES	30 - 65
SPEED RATING	H - W



Benefits and Features

- New generation of directional Ultra High Performance tyre
- Circumferential V-grooves ensure outstanding water drainage
- Strong center ribs provides remarkable handling while steering
- Improved SILICA compounding enhance the wet and dry grip

ZUPERA CE SA-57

Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	UTQG
185/60R14	82H	5.5J	189	578	475	300	460 A A
175/65R14	82H	5.0J	177	584	475	300	460 A A
185/65R14	86H	5.5J	189	596	530	300	460 A A
195/50R15	82V	6.0J	201	577	475	300	460 A A
185/55R15	82V	6.0J	194	585	475	300	460 A A
195/55R15	85V	6.0J	201	595	515	300	460 A A
185/60R15	84H	5.5J	189	603	500	300	460 A A
195/60R15	88V	6.0J	201	615	560	300	460 A A
195/65R15	91V	6.0J	201	635	615	300	460 A A
205/45ZR16 XL	87W	7.0J	206	590	545	350	460 A A
195/50R16	84V	6.0J	201	602	500	300	460 A A
205/50R16	87W	6.5J	214	612	545	300	460 A A
225/50R16	92W	7.0J	233	632	630	300	460 A A
205/55R16 XL	94W	6.5J	214	632	670	350	460 A A
215/55R16 XL	97W	7.0J	226	642	730	350	460 A A
225/55R16 XL	99W	7.0J	233	654	775	350	460 A A
235/60R16	100H	7.0J	240	688	800	300	460 A A
205/40ZR17 XL	84W	7.5J	212	596	500	350	460 A A
215/40ZR17 XL	87W	7.5J	218	604	545	350	460 A A
245/40ZR17 XL	95W	8.5J	248	628	690	350	460 A A
205/45ZR17 XL	88W	7.0J	206	616	560	350	460 A A
215/45ZR17 XL	91W	7.0J	213	626	615	350	460 A A
225/45ZR17 XL	94W	7.5J	225	634	670	350	460 A A
235/45ZR17 XL	97W	8.0J	236	644	730	350	460 A A
205/50R17 XL	93W	6.5J	214	638	650	350	460 A A
215/50R17 XL	95W	7.0J	226	648	690	350	460 A A
225/50R17 XL	98W	7.0J	233	658	750	350	460 A A
215/55R17 XL	98W	7.0J	226	668	750	350	460 A A
225/55R17 XL	101W	7.0J	233	680	825	350	460 A A
235/55R17 XL	103W	7.5J	245	690	875	350	460 A A
265/35ZR18 XL	97W	9.5J	271	643	730	350	460 A A
225/40ZR18 XL	92W	8.0J	230	637	630	350	460 A A
235/40ZR18 XL	95W	8.5J	241	645	690	350	460 A A
245/40ZR18 XL	97W	8.5J	248	653	730	350	460 A A
225/45ZR18 XL	95W	7.5J	225	659	690	350	460 A A
235/45ZR18 XL	98W	8.0J	236	669	750	350	460 A A
245/45ZR18 XL	100W	8.0J	243	677	800	350	460 A A
225/50R18	95W	7.0J	233	683	690	300	460 A A
235/50R18 XL	101W	7.5J	245	693	825	350	460 A A
255/55R18 XL	109V	8.0J	265	737	1030	350	460 A A
265/60R18	110V	8.0J	272	775	1060	300	460 A A
215/35ZR19 XL	85W	7.5J	218	633	515	350	460 A A
225/35ZR19 XL	88W	8.0J	230	641	560	350	460 A A
245/45ZR19 XL	102W	8.0J	243	703	850	350	460 A A
255/45ZR19 XL	104W	8.5J	255	713	900	350	460 A A
205/30ZR20	80W	7.5J	212	632	450	350	460 A A
215/30ZR20	82W	7.5J	218	638	475	350	460 A A
245/30ZR20 XL	90W	8.5J	248	656	600	350	460 A A
275/40ZR20 XL	106W	9.5J	278	728	950	350	460 A A
255/45R20 XL	105V	8.5J	255	738	925	350	460 A A
275/45R20 XL	110V	9.0J	273	756	1060	350	460 A A
265/50R20 XL	111V	8.5J	277	774	1090	350	460 A A
285/50R20	112V	9.0J	297	794	1120	300	460 A A
275/55R20 XL	117V	8.5J	284	810	1285	350	460 A A
275/60R20 XL	119V	8.0J	279	838	1360	350	460 A A
265/35R22 XL	102V	9.5J	271	745	850	350	460 A A
285/35R22 XL	106V	10.0J	290	759	950	350	460 A A
265/40R22 XL	106V	9.5J	271	771	950	350	460 A A
305/40R22 XL	114V	11.0J	313	803	1180	350	460 A A
305/45R22 XL	118V	10.0J	303	833	1320	350	460 A A
295/35R24 XL	110V	10.5J	301	816	1060	350	460 A A

Made in Thailand

Made in China



RP18 WEST LAKE only

Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	UTQG
155/65R13	73T	4.5B	157	532	365	300	500 A A
165/65R13	77T	5.0B	170	544	412	300	500 A A
165/70R13	79T	5.0B	170	562	437	300	500 A A
175/70R13	82T	5.0B	177	576	475	300	500 A A
175/75R13	85T	5.0J	177	592	515	300	500 A A
185/70R13	86T	5.5J	189	590	530	300	500 A A
155/80R13	79T	4.5B	157	578	437	300	500 A A
165/80R13	83T	4.5B	165	594	487	300	500 A A
165/55R14	72V	5.0J	170	538	355	300	500 A A
185/60R14	82H	5.5J	189	578	475	300	500 A A
195/60R14	86H	6.0J	201	590	530	300	500 A A
155/65R14	75H	4.5B	157	558	387	300	500 A A
165/65R14	79H	5.0J	170	570	437	300	500 A A
175/65R14	82H	5.0J	177	584	475	300	500 A A
185/65R14	86H	5.5J	189	596	530	300	500 A A
165/70R14	81T	5.0J	170	588	462	300	500 A A
175/70R14	84T	5.0J	177	602	500	300	500 A A
185/70R14	88T	5.5J	189	616	560	300	500 A A
195/70R14	91T	6.0J	201	630	615	300	500 A A
205/70R14	95T	6.0J	209	644	690	300	500 A A
175/75R14	87T	5.0J	177	618	545	300	500 A A
175/80R14	88T	5.0J	177	636	560	300	500 A A
185/80R14	91T	5.0J	184	652	615	300	500 A A
165/50R15	72V	5.0J	170	547	355	300	500 A A
195/50R15	82V	6.0J	201	577	475	300	500 A A
185/55R15	82V	6.0J	194	585	475	300	500 A A
195/55R15	85V	6.0J	201	595	515	300	500 A A
205/55R15	88V	6.5J	214	607	560	300	500 A A
185/60R15	84H	5.5J	189	603	500	300	500 A A
195/60R15	88H	6.0J	201	615	560	300	500 A A
205/60R15	91H	6.0J	209	627	615	300	500 A A
215/60R15	94H	6.5J	221	639	670	300	500 A A
175/65R15	84H	5.0J	177	609	500	300	500 A A
185/65R15	88H	5.5J	189	621	560	300	500 A A
195/65R15	91H	6.0J	201	635	615	300	500 A A
205/65R15	94H	6.0J	209	647	670	300	500 A A
215/65R15	96H	6.5J	221	661	710	300	500 A A
205/70R15	96H	6.0J	209	669	710	300	500 A A
215/70R15	98H	6.5J	221	683	750	300	500 A A
195/50R16	84V	6.0J	201	602	500	300	500 A A
205/50R16	87V	6.5J	214	612	545	300	500 A A
185/55R16	83V	6.0J	194	610	487	300	500 A A
195/55R16 XL	91H	6.0J	201	620	545	350	500 A A
205/55R16	91V	6.5J	214	632	615	300	500 A A
215/55R16	93V	7.0J	226	642	650	300	500 A A
225/55R16	95V	7.0J	233	654	690	300	500 A A
195/60R16	89H	6.0J	201	640	580	300	500 A A
205/60R16	92H	6.0J	209	652	630	300	500 A A
215/60R16	95H	6.5J	221	664	690	300	500 A A
225/60R16	98H	6.5J	228	676	750	300	500 A A
235/60R16	100H	7.0J	240	688	800	300	500 A A
205/65R16	95H	6.0J	209	672	690	300	500 A A
215/65R16	98H	6.5J	221	686	750	300	500 A A
225/65R16	100H	6.5J	228	698	800	300	500 A A
235/65R16	103H	7.0J	240	712	875	300	500 A A


Made in Thailand

Made in China



M+S

RIM SIZE	13 - 16
SERIES	50 - 80
SPEED RATING	T - V




Benefits and Features

- Premium all-season touring tyres with M+S rated offering consistent highway performance
- Improved tyre structure guarantees a comfort and smooth ride
- CAD designed tyre tread helps to reduce road noise significantly
- Remarkable handling on dry and wet road surface



M+S

RIM SIZE	13 - 16
SERIES	50 - 80
SPEED RATING	T - V



Benefits and Features

- A comfortable ride premium touring tyre
- Computer aided designed tread offering low noise and excellent water drainage
- SILICA TECH compounding technology ensuring low rolling resistance and saving fuel expenditure
- Improved shoulder sipes providing better handling during cornering

RP28

Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	UTQG
155/65R13	73T	4.5J	157	532	365	300	400 A A
165/65R13	77T	5.0J	170	544	412	300	400 A A
155/70R13	75T	4.5B	157	548	387	300	400 A A
165/70R13	79T	5.0B	170	562	437	300	400 A A
175/70R13	82T	5.0B	177	576	475	300	400 A A
185/70R13	86T	5.5J	189	590	530	300	400 A A
155/80R13	79T	4.5B	157	578	437	300	400 A A
165/80R13	83T	4.5B	165	594	487	300	400 A A
185/55R14	80V	6.0J	194	560	450	300	360 A A
165/60R14	75H	5.0J	170	554	387	300	400 A A
175/60R14	79H	5.0J	177	566	437	300	400 A A
185/60R14	82H	5.5J	189	578	475	300	400 A A
195/60R14	86H	6.0J	201	590	530	300	440 A A
205/60R14	88H	6.0J	209	602	560	300	440 A A
155/65R14	75T	4.5J	157	558	387	300	400 A A
165/65R14	79T	5.0J	170	570	437	300	400 A A
175/65R14	82H	5.0J	177	584	475	300	400 A A
185/65R14	86H	5.5J	189	596	530	300	400 A A
195/65R14	89H	6.0J	201	610	580	300	440 A A
165/70R14	81T	5.0J	170	588	462	300	400 A A
175/70R14	84T	5.0J	177	602	500	300	400 A A
185/70R14	88T	5.5J	189	616	560	300	400 A A
195/70R14	91T	6.0J	201	630	615	300	440 A A
205/70R14	95T	6.0J	209	644	690	300	440 A A
175/80R14	88T	5.0J	177	636	560	300	400 A A
185/80R14	91T	5.0J	184	652	690	300	400 A A
195/50R15	82V	6.0J	201	577	475	300	360 A A
185/55R15	82V	6.0J	194	585	475	300	360 A A
195/55R15	85V	6.0J	201	595	515	300	360 A A
175/60R15	81H	5.0J	177	591	462	300	400 A A
185/60R15	84H	5.5J	189	603	500	300	400 A A
195/60R15	88H	6.0J	201	615	560	300	440 A A
205/60R15	91H	6.0J	209	627	615	300	440 A A
215/60R15	94H	6.5J	221	639	670	300	440 A A
165/65R15	81H	5.0J	170	595	462	300	400 A A
175/65R15	84H	5.0J	177	609	500	300	400 A A
185/65R15	88H	5.5J	189	621	560	300	400 A A
195/65R15	91H	6.0J	201	635	615	300	440 A A
205/65R15	94H	6.0J	209	647	670	300	440 A A
215/65R15	96H	6.5J	221	661	710	300	500 A A
205/70R15	96H	6.0J	209	669	710	300	500 A A
215/70R15	98H	6.5J	221	683	750	300	500 A A
225/70R15	100T	6.5J	228	697	800	300	500 A A
205/50R16	87V	6.5J	214	612	545	300	500 A A
205/55R16	91V	6.5J	214	632	615	300	500 A A
205/60R16	92H	6.0J	209	652	630	300	500 A A
215/60R16	95H	6.5J	221	664	690	300	500 A A
225/60R16	98H	6.5J	228	676	750	300	500 A A
235/60R16	100H	7.0J	240	688	800	300	500 A A
205/65R16	95H	6.0J	209	672	690	300	500 A A
215/65R16	98H	6.5J	221	686	750	300	500 A A
225/65R16	100H	6.5J	228	698	800	300	500 A A
235/65R16	103H	7.0J	240	712	875	300	500 A A
215/55R17	94H	7.0J	226	668	670	300	500 A A
225/55R17	97H	7.0J	233	680	730	300	500 A A
235/55R17	99H	7.5J	245	690	775	300	500 A A
215/60R17	96H	6.5J	221	690	710	300	500 A A
225/60R17	99H	6.5J	228	702	775	300	500 A A
235/60R17	102H	7.0J	240	714	850	300	440 A A
215/65R17	99T	6.5J	221	712	775	300	440 A A
225/65R17	102H	6.5J	228	724	850	300	440 A A

● Made in China

RP08 CHAOYANG TRAZANO


Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	UTQG
175/70R13	82T	5.0B	177	576	475	300	500 A A
185/70R13	86T	5.5J	189	590	530	300	500 A A
155/80R13	79T	4.5B	157	578	437	300	500 A A
165/55R14	72V	5.0J	170	538	355	300	500 A A
165/60R14	75H	5.0J	170	554	387	300	500 A A
185/60R14	82H	5.5J	189	578	475	300	500 A A
195/60R14	86H	6.0J	201	590	530	300	500 A A
165/65R14	79H	5.0J	170	570	437	300	500 A A
175/65R14	82H	5.0J	177	584	475	300	500 A A
185/65R14	86H	5.5J	189	596	530	300	500 A A
175/70R14	84T	5.0J	177	602	500	300	500 A A
185/70R14	88T	5.5J	189	616	560	300	500 A A
195/70R14	91T	6.0J	201	630	615	300	500 A A
205/70R14	95T	6.0J	209	644	690	300	500 A A
165/50R15	72V	5.0J	170	547	355	300	500 A A
195/50R15	82V	6.0J	201	577	475	300	500 A A
195/55R15	85V	6.0J	201	595	515	300	500 A A
185/60R15	84H	5.5J	189	603	500	300	500 A A
195/60R15	88H	6.0J	201	615	560	300	500 A A
205/60R15	91H	6.0J	209	627	615	300	500 A A
215/60R15	94H	6.5J	221	639	670	300	500 A A
185/65R15	88H	5.5J	189	621	560	300	500 A A
195/65R15	91H	6.0J	201	635	615	300	500 A A
205/65R15	94H	6.0J	209	647	670	300	500 A A
215/65R15	96H	6.5J	221	661	710	300	500 A A
205/70R15	96H	6.0J	209	669	710	300	500 A A
215/70R15	98H	6.5J	221	683	750	300	500 A A
225/70R15	100T	6.5J	228	697	800	300	500 A A
205/50R16	87V	6.5J	214	612	545	300	500 A A
205/55R16	91V	6.5J	214	632	615	300	500 A A
205/60R16	92H	6.0J	209	652	630	300	500 A A
215/60R16	95H	6.5J	221	664	690	300	500 A A
225/60R16	98H	6.5J	228	676	750	300	500 A A
235/60R16	100H	7.0J	240	688	800	300	500 A A
205/65R16	95H	6.0J	209	672	690	300	500 A A
215/65R16	98H	6.5J	221	686	750	300	500 A A
225/65R16	100H	6.5J	228	698	800	300	500 A A
235/65R16	103H	7.0J	240	712	875	300	500 A A
215/55R17	94H	7.0J	226	668	670	300	500 A A
225/55R17	97H	7.0J	233	680	730	300	500 A A
235/55R17	99H	7.5J	245	690	775	300	500 A A
215/60R17	96H	6.5J	221	690	710	300	500 A A
225/60R17	99H	6.5J	228	702	775	300	500 A A
235/60R17	102H	7.0J	240	714	850	300	440 A A
215/65R17	99T	6.5J	221	712	775	300	440 A A
225/65R17	102H	6.5J	228	724	850	300	440 A A

● Made in Thailand



M+S

RIM SIZE	13 - 17
SERIES	50 - 80
SPEED RATING	T - V




Benefits and Features

- Premium all-season touring performance tyres with high mileage capacity
- High-density siping improves traction in rain and snow
- Four wide longitudinal grooves provides perfect water evacuation
- Variable pitch tread block design for low noise generation



M+S

RIM SIZE	13 - 18
SERIES	40 - 80
SPEED RATING	T - V



Benefits and Features

- Variable pitches tread blocks for high stability and reduce noise
- Continuous center rib delivering better straight handling
- Four grooves with open shoulder provides perfect water evacuation

RP88 GOODRIDE only

Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	UTQG
175/70R13	82T	5.0B	177	576	475	300	500 A A
185/70R13	86T	5.5J	189	590	530	300	500 A A
155/80R13	79T	4.5B	157	578	437	300	500 A A
165/55R14	72V	5.0J	170	538	355	300	500 A A
185/60R14	82H	5.5J	189	578	475	300	500 A A
195/60R14	86H	6.0J	201	590	530	300	500 A A
175/65R14	82H	5.0J	177	584	475	300	500 A A
185/65R14	86H	5.5J	189	596	530	300	500 A A
175/70R14	84T	5.0J	177	602	500	300	500 A A
185/70R14	88T	5.5J	189	616	560	300	500 A A
195/70R14	91T	6.0J	201	630	615	300	500 A A
205/70R14	95T	6.0J	209	644	690	300	500 A A
165/50R15	72V	5.0J	170	547	355	300	500 A A
195/50R15	82V	6.0J	201	577	475	300	500 A A
185/55R15	82V	6.0J	194	585	475	300	500 A A
195/55R15	85V	6.0J	201	595	515	300	500 A A
185/60R15	84H	5.5J	189	603	500	300	500 A A
195/60R15	88H	6.0J	201	615	560	300	500 A A
205/60R15	91H	6.0J	209	627	615	300	500 A A
175/65R15	84H	5.0J	177	609	500	300	500 A A
185/65R15	88H	5.5J	189	621	560	300	500 A A
195/65R15	91H	6.0J	201	635	615	300	500 A A
205/65R15	94H	6.0J	209	647	670	300	500 A A
205/70R15	96H	6.0J	209	669	710	300	500 A A
215/70R15	98H	6.5J	221	683	750	300	500 A A
205/50R16	87V	6.5J	214	612	545	300	500 A A
185/55R16	83V	6.0J	194	610	487	300	500 A A
205/55R16	91V	6.5J	214	632	615	300	500 A A
185/60R16	86H	5.5J	189	628	530	300	500 A A
205/60R16	92H	6.0J	209	652	630	300	500 A A
215/60R16	95H	6.5J	221	664	690	300	500 A A
225/60R16	98H	6.5J	228	676	750	300	500 A A
235/60R16	100H	7.0J	240	688	800	300	500 A A
205/65R16	95H	6.0J	209	672	690	300	500 A A
215/65R16	98H	6.5J	221	686	750	300	500 A A
225/65R16	100H	6.5J	228	698	800	300	500 A A
235/65R16	103H	7.0J	240	712	875	300	500 A A
225/50R17	94V	7.0J	233	658	670	300	500 A A
215/55R17	94V	7.0J	226	668	670	300	500 A A
225/55R17	97H	7.0J	233	680	730	300	500 A A
235/55R17	99H	7.5J	245	690	775	300	500 A A
225/60R17	99H	6.5J	228	702	775	300	500 A A
225/65R17	102T	6.5J	228	724	850	300	500 A A
235/65R17	104H	7.0J	240	738	900	300	500 A A
225/40R18 XL	92V	8.0J	230	637	630	350	500 A A
225/45R18 XL	95V	7.5J	225	659	690	350	500 A A
235/45R18 XL	98V	8.0J	236	669	750	350	500 A A
245/45R18 XL	100V	8.0J	243	677	800	350	500 A A
235/50R18	97V	7.5J	245	693	730	300	500 A A
235/65R18	106T	7.0J	240	763	950	300	500 A A

Made in Thailand



RP26

Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	UTQG
175/60R13	77H	5.0J	177	540	412	300	440 A A
205/60R13	86T	6.0J	209	576	530	300	480 A A
155/65R13	73T	4.5B	157	532	365	300	440 A A
165/65R13	77T	5.0B	170	544	412	300	440 A A
165/70R13	79T	5.0B	170	562	437	300	440 A A
175/70R13	82T	5.0B	177	576	475	300	440 A A
185/70R13	86T	5.5J	189	590	530	300	480 A A
155/80R13	79T	4.5B	157	578	437	300	440 A A
165/80R13	83T	4.5B	165	594	487	300	440 A A
175/60R14	79H	5.0J	177	566	437	300	440 A A
185/60R14	82H	5.5J	189	578	475	300	480 A A
195/60R14	86H	6.0J	201	590	530	300	480 A A
155/65R14	75T	4.5B	157	558	387	300	440 A A
175/65R14	82H	5.0J	177	584	475	300	440 A A
185/65R14	86H	5.5J	189	596	530	300	480 A A
165/70R14	81T	5.0J	170	588	462	300	440 A A
175/70R14	84T	5.0J	177	602	500	300	440 A A
185/70R14	88T	5.5J	189	616	560	300	480 A B
195/70R14	91T	6.0J	201	630	615	300	480 A A
205/70R14	95T	6.0J	209	644	690	300	480 A A
175/80R14	88T	5.0J	177	636	560	300	440 A A
185/80R14	91T	5.0J	184	652	615	300	480 A A
175/50R15	75V	5.5J	182	557	387	300	440 A A
195/50R15	82V	6.0J	201	577	475	300	360 A A
175/55R15	77T	5.5J	182	573	412	300	440 A A
185/55R15	82V	6.0J	194	585	475	300	360 A A
195/55R15	85V	6.0J	201	595	515	300	360 A A
205/55R15	88V	6.5J	214	607	560	300	360 A A
175/60R15	81H	5.0J	177	591	462	300	440 A A
185/60R15	84H	5.5J	189	603	500	300	480 A A
195/60R15	88H	6.0J	201	615	560	300	480 A A
205/60R15	91H	6.0J	209	627	615	300	480 A A
215/60R15	94H	6.5J	221	639	670	300	480 A A
175/65R15	84H	5.0J	177	609	500	300	440 A A
185/65R15	88H	5.5J	189	621	560	300	480 A A
195/65R15	91H	6.0J	201	635	615	300	480 A A
205/65R15	94H	6.0J	209	647	670	300	480 A A
215/65R15	96H	6.5J	221	661	710	300	480 A A
205/70R15	96H	6.0J	209	669	710	300	480 A A
215/70R15	98H	6.5J	221	683	750	300	480 A A
195/50R16	84V	6.0J	201	602	500	300	360 A A
185/55R16	83V	6.0J	194	610	487	300	360 A A
195/55R16 XL	91V	6.0J	201	620	615	350	360 A A
205/55R16	91V	6.5J	214	632	615	300	360 A A
195/60R16	89H	6.0J	201	640	580	300	480 A A
205/60R16	92H	6.0J	209	652	630	300	480 A A
215/60R16	95H	6.5J	221	664	690	300	480 A A
225/60R16	98H	6.5J	228	676	750	300	480 A A
235/60R16	100H	7.0J	240	688	800	300	480 A A
205/65R16	95H	6.0J	209	672	690	300	480 A A
215/65R16	98H	6.5J	221	686	750	300	480 A A
225/65R16	100H	6.5J	228	698	800	300	480 A A

Made in China



M+S

RIM SIZE	13 - 16
SERIES	50 - 80
SPEED RATING	T - V




Benefits and Features

- Improved tyre structure compared to competitor for longer tyre life and more comfort ride
- Special compound offers remarkable tyre traction



M+S

RIM SIZE	13 - 16
SERIES	50 - 70
SPEED RATING	T - V



Benefits and Features

- Variable pitches tread blocks for high stability and reduce noise
- Continuous center rib delivering better straight handling
- Four grooves with open shoulder provides perfect water evacuation

RP36 WEST LAKE only

Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	UTQG
155/65R13	73T	4.5B	157	532	365	300	440 A A
165/65R13	77T	5.0B	170	544	412	300	440 A A
155/70R13	75T	4.5B	157	548	387	300	440 A A
165/70R13	79T	5.0B	170	562	437	300	440 A A
175/70R13	82T	5.0B	177	576	475	300	440 A A
185/70R13	86T	5.5J	189	590	530	300	480 A A
165/60R14	75H	5.0J	170	554	387	300	440 A A
185/60R14	82H	5.5J	189	578	475	300	480 A A
195/60R14	86H	6.0J	201	590	530	300	480 A A
155/65R14	75T	4.5B	157	558	387	300	440 A A
175/65R14	82H	5.0J	177	584	475	300	440 A A
185/65R14	86H	5.5J	189	596	530	300	480 A A
165/70R14	81T	5.0J	170	588	462	300	440 A A
175/70R14	84T	5.0J	177	602	500	300	440 A A
185/70R14	88T	5.5J	189	616	560	300	480 A A
195/70R14	91T	6.0J	201	630	615	300	480 A A
195/50R15	82V	6.0J	201	577	475	300	360 A A
195/55R15	85V	6.0J	201	595	515	300	360 A A
185/60R15	84H	5.5J	189	603	500	300	480 A A
195/60R15	88V	6.0J	201	615	560	300	360 A A
205/60R15	91H	6.0J	209	627	615	300	480 A A
185/65R15	88H	5.5J	189	621	560	300	480 A A
195/65R15	91V	6.0J	201	635	615	300	360 A A
205/65R15	94H	6.0J	209	647	670	300	480 A A
205/70R15	96H	6.0J	209	669	710	300	480 A A
215/70R15	98H	6.5J	221	683	750	300	480 A A
195/55R16	87V	6.0J	201	620	545	300	360 A A
205/55R16	91V	6.5J	214	632	615	300	360 A A
215/55R16	93V	7.0J	226	642	650	300	360 A A
195/60R16	89H	6.0J	201	640	580	300	480 A A
205/60R16	92H	6.0J	209	652	630	300	480 A A
215/60R16	95H	6.5J	221	664	690	300	480 A A
225/60R16	98H	6.5J	228	676	750	300	480 A A
235/60R16	100H	7.0J	240	688	800	300	480 A A
205/65R16	95H	6.0J	209	672	690	300	480 A A

● Made in China



SU318 H/T

Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	UTQG
225/70R15	100T	6.5J	228	697	800	300	500 A A
235/70R15	103T	7.0J	240	711	875	300	500 A A
265/70R15	112T	8.0J	272	753	1120	300	500 A A
215/75R15	100T	6.0J	216	703	800	300	500 A A
225/75R15	102T	6.0J	223	719	850	300	500 A A
235/75R15	105T	6.5J	235	733	925	300	500 A A
265/75R15	112T	7.5J	267	779	1120	300	500 A A
215/65R16	98H	6.5J	221	686	750	300	450 A A
255/65R16	109T	7.5J	260	738	1030	300	500 A A
215/70R16	100T	6.5J	221	708	800	300	500 A A
225/70R16	103T	6.5J	228	722	875	300	500 A A
235/70R16	106T	7.0J	240	736	950	300	500 A A
245/70R16 XL	111T	7.0J	248	750	1090	350	500 A A OWL
255/70R16	111T	7.5J	260	764	1090	300	500 A A
265/70R16	112T	8.0J	272	778	1120	300	500 A A OWL
275/70R16	114T	8.0J	279	792	1180	300	500 A A
225/75R16	104T	6.0J	223	744	900	300	500 A A
235/75R16	108T	6.5J	235	758	1000	300	500 A A
245/75R16	111T	7.0J	248	774	1090	300	500 A A
265/75R16	116T	7.5J	267	804	1250	300	500 A A
215/60R17	96H	6.5J	221	690	710	300	500 A A
225/60R17	99T	6.5J	228	702	775	300	500 A A
235/60R17	102T	7.0J	240	714	850	300	500 A A
255/60R17 XL	110V	7.5J	260	738	1060	350	500 A A
265/60R17	108T	8.0J	272	750	1000	300	500 A A
275/60R17	110T	8.0J	279	762	1060	300	500 A A
215/65R17	99T	6.5J	221	712	775	300	500 A A
225/65R17	102T	6.5J	228	724	850	300	500 A A
235/65R17	104T	7.0J	240	738	900	300	500 A A
245/65R17	107T	7.0J	248	750	975	300	500 A A
255/65R17	110H	7.5J	260	764	1060	300	500 A A
265/65R17	112T	8.0J	272	776	1120	300	500 A A OWL
275/65R17	115T	8.0J	279	790	1215	300	500 A A
285/65R17	116H	8.5J	292	802	1250	300	500 A A
245/70R17	110T	7.0J	248	776	1060	300	500 A A
255/70R17	112T	7.5J	260	790	1120	300	500 A A
265/70R17	115T	8.0J	272	804	1215	300	500 A A
235/50R18	97V	7.5J	245	693	730	300	500 A A
225/55R18	98V	7.0J	233	705	750	300	500 A A
235/55R18	100V	7.5J	245	715	800	300	500 A A
255/55R18 XL	109V	8.0J	265	737	1030	350	500 A A
225/60R18	100H	6.5J	228	727	800	300	500 A A
235/60R18	103V	7.0J	240	739	875	300	500 A A
245/60R18	105T	7.0J	248	751	925	300	500 A A
255/60R18 XL	112V	7.5J	260	763	1120	350	500 A A
265/60R18 XL	114V	8.0J	272	775	1180	350	500 A A OWL
285/60R18	116H	8.5J	292	799	1250	300	500 A A
235/65R18	106H	7.0J	240	763	950	300	500 A A
255/65R18	111T	6.5J	228	749	1090	300	500 A A
265/65R18	114T	8.0J	272	801	1180	300	500 A A
275/65R18	116T	8.0J	279	815	1250	300	500 A A
255/70R18	113T	7.5J	260	815	1150	300	500 A A
265/70R18	116T	8.0J	272	829	1250	300	500 A A
275/45R19 XL	108V	9.0J	273	731	1000	350	500 A A
235/50R19	99V	7.5J	245	719	775	300	500 A A
255/50R19 XL	107V	8.0J	265	739	975	350	500 A A
265/50R19 XL	110V	8.5J	277	749	1060	350	500 A A
225/55R19	99V	7.0J	233	731	772	300	500 A A
235/55R19 XL	105V	7.5J	245	741	925	350	500 A A
245/55R19	103V	7.5J	253	753	875	300	500 A A
255/55R19 XL	111V	8.0J	265	763	1090	350	500 A A
255/60R19	109H	7.5J	260	789	1030	300	500 A A
275/40R20 XL	106V	9.5J	278	728	950	350	500 A A
275/45R20 XL	110V	9.0J	273	756	1060	350	500 A A
245/50R20	102V	7.5J	253	754	850	300	500 A A
255/50R20 XL	109V	8.0J	265	764	1030	350	500 A A
285/50R20	116V	9.0J	297	794	1250	350	500 A A
235/55R20	102H	7.5J	245	766	850	300	500 A A
255/55R20	107H	8.0J	265	764	1030	350	500 A A
275/55R20 XL	117V	8.5J	284	810	1285	350	500 A A
275/60R20	115H	8.0J	279	838	1215	300	500 A A
285/45R22	114H	9.5J	285	815	1180	350	500 A A


● Made in Thailand

● Made in China



M+S

RIM SIZE	15 - 22
SERIES	40 - 75
SPEED RATING	T - V



Benefits and Features

- Ideal H/T tyre integrated outstanding on-road comfort and wet traction safety as a whole
- Four longitude grooves combined with wind sipes ensure excellent water evacuation and wet traction performance
- SILICA TECH adopted for better wet grip as well as low rolling resistance
- Re-constructed steel bead wire improves driving comfort effectively



M+S

RIM SIZE	15 - 20
SERIES	55 - 75
SPEED RATING	T - V



Benefits and Features

- All season, comfort ride tyre designed for highway application
- Asymmetric tread design provides various functions in different parts and enables a quieter ride

SU317 H/T

Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	UTQG
● P225/70R15	100H	6.5J	228	697	800	300	600 A A
● P235/70R15	103H	7.0J	240	711	875	300	600 A A
● P265/70R15	112H	8.0J	272	753	1120	300	600 A A
● P215/75R15	100H	6.0J	216	703	800	300	450 A A
● P225/75R15	102H	6.0J	223	719	850	300	600 A A
● P235/75R15	105H	6.5J	235	733	925	300	600 A A
● P215/65R16	98H	6.5J	221	686	750	300	450 A A
● P255/65R16	109H	7.5J	260	738	1030	300	600 A A
● P215/70R16	100T	6.5J	221	708	800	300	600 A A
● P225/70R16	103H	6.5J	228	722	875	300	600 A A
● P235/70R16	106H	7.0J	240	736	950	300	450 A A
● P245/70R16	107T	7.0J	248	750	975	300	600 A A
● P255/70R16	111H	7.5J	260	764	1090	300	600 A A
● P265/70R16	112T	8.0J	272	778	1120	300	600 A A
● P275/70R16	114H	8.0J	279	792	1180	300	600 A A
● P225/75R16	104H	6.0J	223	744	900	300	600 A A
● P235/75R16	108H	6.5J	235	758	1000	300	600 A A
● P245/75R16	111H	7.0J	248	774	1090	300	600 A A
● P265/75R16	116H	7.5J	267	804	1250	300	600 A A
● P215/60R17	96H	6.5J	221	690	710	300	400 AA A
● P225/65R17	102H	6.5J	228	724	850	300	450 A A
● P235/65R17	104H	7.0J	240	738	900	300	450 A A
● P245/65R17	107T	7.0J	248	750	975	300	600 A A
● P265/65R17	112H	8.0J	272	776	1120	300	600 A A
● P285/65R17	116H	8.5J	292	802	1250	300	600 A A
● P265/70R17	115H	8.0J	272	804	1215	300	600 A A
● P275/55R20 XL	117V	8.5J	284	810	1285	350	600 A A

● Made in Thailand

● Made in China



SV308

Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	UTQG
● 245/30ZR20 XL	90W	8.5J	248	656	600	300	360 A A
● 275/45R20 XL	110H	9.0J	273	756	1060	300	460 A A
● 285/50R20	112H	9.0J	297	794	1120	300	460 A A
● 275/55R20 XL	117H	8.5J	284	810	1285	300	460 A A
● 265/35R22	98H	9.5J	271	745	750	300	460 A A
● 305/40R22	110H	11.0J	313	803	1060	300	460 A A
● 305/45R22 XL	118H	10.0J	303	833	1320	300	460 A A
● 305/35R24 XL	112H	11.0J	313	824	1120	300	460 A A

● Made in Thailand



M+S

RIM SIZE	20 - 24
SERIES	30 - 55
SPEED RATING	H - W




Benefits and Features

- All season Silica-based compound for improving wet and dry traction without sacrificing tread wear
- RIM PROTECTOR protects the wheel rim and helps resist lateral deflection while providing superior handling control and enhanced cornering
- Circumferential V-groove promote proper water drainage without impacting cornering grip
- Solid center rib provides stable on-center feel and outstanding wet traction during cornering



M+S

RIM SIZE	14 - 20
SERIES	45 - 80
SPEED RATING	S - V



Benefits and Features

- Wide tread and multi-stepped grooves increase surface area of tread to enhance traction on both on and off roads
- Zig-zag grooves offers efficient water drainage and enhanced traction on wet road
- Large tread blocks help enhanced stability and handling with less noise on highway
- Aggressive sidewall protectors increase off-road bite and prevent damage from sidewall cut and abrasions

SL369 A/T

Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	UTQG
175/70R14	84T	5.0J	177	602	500	300	440 A A
175/80R14	88T	5.0J	177	636	560	300	440 A A
P215/75R14	100T	6.0J	216	678	800	300	500 A A
205/65R15	94H	6.0J	209	647	670	300	500 A A
205/70R15	96H	6.0J	209	669	710	300	500 A A
225/70R15	100T	6.5J	228	697	800	300	500 A A OWL
235/70R15	103S	7.0J	240	711	875	300	500 A A
265/70R15	112T	8.0J	272	753	1120	300	500 A A
P215/75R15	100S	6.0J	216	703	800	300	500 A A OWL
235/75R15 XL	109S	6.5J	235	733	1030	350	500 A A OWL
245/75R15	108T	7.0J	248	749	1000	300	500 A A
205/60R16	92H	6.0J	209	652	630	300	500 A A
235/60R16	100T	7.0J	240	688	800	300	500 A A
215/70R16	100S	6.5J	221	708	800	300	500 A A
225/70R16	103S	6.5J	228	722	875	300	500 A A
235/70R16	106S	7.0J	240	736	950	300	500 A A
245/70R16 XL	111S	7.0J	248	750	1090	350	500 A A OWL
255/70R16	111T	7.5J	260	764	1090	300	500 A A OWL
265/70R16	112S	8.0J	272	778	1120	300	500 A A OWL
275/70R16	114S	8.0J	279	792	1180	300	500 A A OWL
225/75R16 XL	108S	6.0J	223	744	1000	350	500 A A
235/75R16 XL	112S	6.5J	235	758	1120	350	500 A A
245/75R16	111S	7.0J	248	774	1090	300	500 A A
265/75R16	116S	7.5J	267	804	1250	300	500 A A
205/80R16 XL	104S	5.5J	203	734	900	350	440 A A
215/80R16 XL	107S	6.0J	216	750	975	350	440 A A
225/65R17	102T	6.5J	228	724	850	300	500 A A
235/65R17	104S	7.0J	240	738	900	300	500 A A
245/65R17	107S	7.0J	248	750	975	300	500 A A
255/65R17	110T	7.5J	260	764	1060	300	500 A A
265/65R17	112S	8.0J	272	776	1120	300	500 A A OWL
225/70R17 XL	108S	6.5J	228	748	1000	350	500 A A
245/70R17	110T	7.0J	248	776	1000	300	500 A A
255/70R17	112T	7.5J	260	790	1120	300	500 A A
265/70R17	115T	8.0J	272	804	1215	300	500 A A OWL
285/70R17	117T	8.5J	292	832	1285	300	500 A A
235/75R17	109T	6.5J	235	784	1030	300	500 A A
245/75R17	112T	7.0J	248	800	1120	300	500 A A
255/75R17	115T	7.0J	255	814	1215	300	500 A A
265/60R18	110T	8.0J	272	775	1060	300	500 A A
285/60R18	116T	8.5J	292	799	1250	300	500 A A
265/65R18	114T	8.0J	272	801	1180	300	500 A A
275/65R18	116T	8.0J	279	815	1250	300	500 A A
275/45R20 XL	110H	9.0J	273	756	1060	350	500 A A
265/50R20 XL	111T	8.5J	277	774	1090	350	500 A A
285/50R20 XL	116V	9.0J	297	794	1250	350	500 A A
275/55R20	113S	8.5J	284	810	1150	300	500 A A
275/60R20	115T	8.0J	279	838	1215	300	500 A A

Made in Thailand
 Made in China




SL369 A/T

Size	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
30×9.5R15LT	C/6PR	104Q	7.5J	240	750	900	350	TL
31×10.50R15LT	C/6PR	109Q	8.5J	268	775	1030	350	TL OWL
35×12.50R17LT	E/10PR	121Q	10.0J	318	877	1450	450	TL
LT235/75R15	C/6PR	104/101Q	6.5J	235	733	900/825	350	TL
LT235/75R15	D/8PR	110/107Q	6.5J	235	733	1060/975	450	TL
LT245/70R16	E/10PR	118/115Q	7.0J	248	750	1320/1215	550	TL
LT265/70R16	E/10PR	121/118Q	8.0J	272	778	1450/1320	550	TL OWL
LT305/70R16	E/10PR	124/121R	9.0J	311	834	1600/1450	450	TL OWL
LT225/75R16	E/10PR	115/112Q	6.0J	223	744	1215/1120	550	TL
LT245/75R16	E/10PR	120/116Q	7.0J	248	774	1380/1260	550	TL OWL
LT265/75R16	E/10PR	123/120Q	7.5J	267	804	1550/1400	550	TL OWL
LT285/75R16	D/8PR	122/119Q	8.0J	286	834	1500/1360	450	TL OWL
LT285/75R16	E/10PR	126/123Q	8.0J	286	834	1700/1550	550	TL OWL
LT315/75R16	E/10PR	127/124R	8.5J	313	878	1750/1600	450	TL
LT205/80R16	D/8PR	110/108S	5.5J	203	734	1060/1000	450	TL OWL
LT215/85R16	E/10PR	115/112Q	6.0J	216	772	1215/1120	550	TL
LT235/85R16	E/10PR	120/116Q	6.5J	235	806	1380/1260	550	TL
LT265/65R17	E/10PR	120/117R	8.0J	272	775	1400/1285	550	TL
LT245/70R17	E/10PR	119/116Q	7.0J	248	776	1360/1250	550	TL
LT265/70R17	E/10PR	121/118Q	8.0J	272	804	1450/1320	550	TL OWL
LT285/70R17	D/8PR	121/118Q	8.5J	292	832	1450/1320	450	TL
LT285/70R17	E/10PR	121/118Q	8.5J	292	832	1450/1320	550	TL
LT315/70R17	E/10PR	121/118R	9.5J	323	874	1450/1320	450	TL
LT245/75R17	E/10PR	121/118Q	7.0J	248	800	1450/1320	550	TL
LT235/80R17	E/10PR	120/117Q	6.5J	235	808	1400/1285	550	TL
LT275/65R18	E/10PR	123/120Q	8.0J	279	815	1550/1400	550	TL
LT285/65R18	E/10PR	125/122R	8.5J	292	827	1650/1500	550	TL
LT265/70R18	E/10PR	124/121R	8.0J	272	829	1600/1450	550	TL
LT275/70R18	E/10PR	125/122S	8.0J	279	843	1650/1500	550	TL
LT285/55R20	E/10PR	122/119R	9.0J	297	822	1500/1360	550	TL
LT305/55R20	E/10PR	121/118R	9.5J	316	844	1450/1320	450	TL
LT275/65R20	E/10PR	126/123S	8.0J	279	866	1700/1550	550	TL

Made in Thailand
 Made in China

M+S

RIM SIZE	15 - 20
SERIES	55 - 85
SPEED RATING	Q - S



Benefits and Features

- Wide tread and multi-stepped grooves increase surface area of tread to enhance traction on both on and off roads
- Zig-zag grooves offers efficient water drainage and enhanced traction on wet road
- Large tread blocks help enhanced stability and handling with less noise on highway
- Aggressive sidewall protectors increase off-road bite and prevent damage from sidewall cut and abrasions



M+S

RIM SIZE	15 - 18
SERIES	60 - 75
SPEED RATING	Q - T



Benefits and Features

- Wide tread and deep sipes increase surface area of tread and enhance traction on all the road conditions
- Robust shoulder blocks increase tread stiffness allowing for maximum wet and dry handling and stability
- Aggressive sidewall protectors increase unpaved tough road bite and prevent damage from sidewall cut

SU327 A/T

Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	UTQG
225/70R15	100T	6.5J	228	697	800	300	500 A A
235/60R16	100T	7.0J	240	688	800	300	500 A A
245/70R16 XL	111S	7.0J	248	750	1090	350	500 A A OWL
265/70R16	112S	8.0J	272	778	1120	300	500 A A OWL
265/65R17	112S	8.0J	272	776	1120	300	500 A A OWL
265/60R18	110T	8.0J	272	775	1060	300	500 A A OWL

Size	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
31×10.50R15LT	C/6PR	109Q	8.5J	268	781	1030	350	TL OWL
LT215/75R15	C/6PR	100/97Q	6.0J	216	703	800/730	350	TL
LT225/75R15	C/6PR	102/99Q	6.0J	223	719	850/775	350	TL
LT235/75R15	C/6PR	104/101Q	6.5J	235	733	900/825	350	TL
LT235/70R16	D/8PR	110/107Q	7.0J	240	736	1060/975	450	TL
LT245/70R16	E/10PR	118/115Q	7.0J	248	750	1320/1215	550	TL
LT255/70R16	D/8PR	115/112Q	7.5J	260	764	1215/1120	450	TL
LT265/70R16	E/10PR	121/118Q	8.0J	272	778	1450/1320	550	TL
LT245/75R16	E/10PR	120/116Q	7.0J	248	780	1380/1260	550	TL
LT265/65R17	E/10PR	120/117R	8.0J	272	776	1400/1285	550	TL

Made in Thailand
 Made in China



M+S

RIM SIZE	14 - 20
SERIES	50 - 85
SPEED RATING	Q - T



Benefits and Features

- Especially designed for unpaved tough roads (Professional off-road tyres)
- Various shoulder blocks promote driving and handling performance on tough roads
- Perfect grip on tough surfaces such as mud and sand

MUD LEGEND SL366

Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	UTQG
265/60R18	110T	8.0J	272	775	1060	300	500 A A
285/60R18	116T	8.5J	292	799	1250	300	500 A A
265/50R20 XL	111T	8.5J	277	774	1090	350	500 A A
275/55R20	113S	8.5J	284	810	1150	300	500 A A

Size	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
185R14C	D/8PR	102/100Q	5.5J	188	650	850/800	450	TL
195R14C	D/8PR	106/104Q	5.5J	198	666	950/900	450	TL
205/70R15C	C/6PR	104/102Q	6.0J	209	669	900/850	375	TL
205R16C	D/8PR	110/108Q	6.0J	208	736	1060/1000	450	TL
30×9.50R15LT	C/6PR	104Q	7.5J	240	756	900	350	TL
31×10.50R15LT	C/6PR	109Q	8.5J	268	781	1030	350	TL
32×11.50R15LT	C/6PR	113Q	9.0J	290	807	1150	350	TL
33×12.50R15LT	C/6PR	108Q	10.0J	318	832	1000	250	TL
35×12.50R15LT	C/6PR	113Q	10.0J	318	883	1150	250	TL
35×12.50R17LT	E/10PR	121Q	10.0J	318	883	1450	450	TL
37×12.50R17LT	E/10PR	124Q	10.0J	318	934	1600	350	TL
35×12.50R18LT	E/10PR	123Q	10.0J	318	883	1550	450	TL
33×12.50R20LT	E/10PR	114Q	10.0J	318	832	1180	450	TL
35×12.50R20LT	E/10PR	121Q	10.0J	318	883	1450	450	TL
LT215/75R15	C/6PR	100/97Q	6.0J	216	703	800/730	350	TL
LT225/75R15	C/6PR	102/99Q	6.0J	223	719	850/775	350	TL
LT235/75R15	C/6PR	104/101Q	6.5J	235	739	900/825	350	TL
LT235/75R15	D/8PR	110/107Q	6.5J	235	739	1060/975	450	TL
LT225/75R16	E/10PR	115/112Q	6.0J	223	750	1215/1120	550	TL
LT245/75R16	E/10PR	120/116Q	7.0J	248	780	1380/1260	550	TL
LT265/75R16	E/10PR	123/120Q	7.5J	267	810	1550/1400	550	TL
LT285/75R16	E/10PR	126/123Q	8.0J	286	840	1700/1550	550	TL
LT315/75R16	E/10PR	127/124R	8.5J	313	878	1750/1600	450	TL
LT235/85R16	E/10PR	120/116Q	6.5J	235	812	1380/1260	550	TL
LT265/65R17	E/10PR	120/117Q	8.0J	272	775	14000/1285	550	TL
LT245/70R17	E/10PR	119/116Q	7.0J	248	782	1360/1250	550	TL
LT265/70R17	E/10PR	121/118Q	8.0J	272	810	1450/1320	550	TL
LT285/70R17	E/10PR	121/118Q	8.5J	292	832	1450/1320	550	TL
LT315/70R17	E/10PR	121/118Q	9.5J	323	880	1450/1320	450	TL

Made in China



M+S

RIM SIZE	15 - 20
SERIES	50 - 85
SPEED RATING	Q - R



Benefits and Features

- New generation premium tyres designed for unpaved tough road (professional off-road tyre)
- Aggressive and open shoulder design provides extreme grips for various terrains
- Stone rejectors protect the tyre casing and minimize stone drilling for long-lasting off-road experience

MUD LEGEND SL376

Size	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
30×9.50R15LT	C/6PR	104Q	7.5J	240	756	900	350	TL
31×10.50R15LT	C/6PR	109Q	8.5J	268	781	1030	350	TL
32×11.50R15LT	C/6PR	113Q	9.0J	290	807	1150	350	TL
33×12.50R15LT	C/6PR	108Q	10.0J	318	832	1000	250	TL
35×12.50R15LT	C/6PR	113Q	10.0J	318	883	1150	250	TL
35×12.50R17LT	E/10PR	121Q	10.0J	318	883	1450	450	TL
35×12.50R18LT	E/10PR	123Q	10.0J	318	883	1550	450	TL
35×12.50R20LT	E/10PR	121Q	10.0J	318	883	1450	450	TL
35×12.50R22LT	F/12PR	121Q	10.0J	318	883	1450	550	TL
37×13.50R22LT	F/12PR	128Q	11J	345	934	1800	550	TL
40×15.50R24LT	F/12PR	128Q	12.5J	395	1010	1800	550	TL
40×15.50R26LT	E/10PR	126Q	12.5J	395	1010	1700	450	TL
LT235/75R15	C/6PR	104/101Q	6.5J	235	739	900/825	350	TL
LT245/75R16	E/10PR	120/116Q	7.0J	248	780	1380/1260	550	TL
LT265/75R16	E/10PR	123/120Q	7.5J	267	810	1550/1400	550	TL
LT285/75R16	E/10PR	126/123Q	8.0J	286	840	1700/1550	550	TL
LT315/75R16	E/10PR	127/124R	8.5J	313	878	1750/1600	450	TL
LT235/85R16	E/10PR	120/116Q	6.5J	235	812	1380/1260	550	TL
LT265/70R17	E/10PR	121/118Q	8.0J	272	810	1450/1320	550	TL
LT285/70R17	E/10PR	121/118Q	8.5J	292	832	1450/1320	550	TL
LT255/75R17	C/6PR	111/108Q	7.0J	255	820	1000/1090	350	TL
LT235/80R17	E/10PR	120/117Q	6.5J	235	814	1285/1400	550	TL
LT275/65R18	E/10PR	123/120Q	8.0J	279	821	1400/1550	550	TL
LT275/70R18	E/10PR	125/122Q	8.0J	279	849	1500/1650	550	TL
LT305/55R20	F/12PR	125/122Q	9.5J	316	850	1500/1650	550	TL
LT275/65R20	E/10PR	126/123Q	8.0J	279	872	1550/1700	550	TL

Made in Thailand



MUD LEGEND SL386


Size	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
31×10.50R15LT	C/6PR	109Q	8.5J	268	781	1030	350	TL
33×12.50R15LT	C/6PR	108Q	10.0J	318	832	1000	250	TL
35×12.50R17LT	E/10PR	121Q	10.0J	318	883	1450	450	TL
37×12.50R17LT	D/8PR	124Q	10.0J	318	934	1600	350	TL
35×12.50R18LT	E/10PR	123Q	10.0J	318	883	1550	450	TL
33×12.50R20LT	E/10PR	114Q	10.0J	318	832	1180	450	TL
35×12.50R20LT	E/10PR	121Q	10.0J	318	883	1450	450	TL
37×12.50R20LT	E/10PR	126Q	10.0J	318	934	1700	450	TL
37×13.50R20LT	E/10PR	127Q	11.0J	345	934	1750	450	TL
35×12.50R22LT	E/10PR	117Q	10.0J	318	883	1285	450	TL
37×13.50R22LT	E/10PR	123Q	11.0J	345	934	1550	450	TL
40×15.50R24LT	E/10PR	128Q	12.5J	395	1010	1800	450	TL
40×15.50R26LT	E/10PR	126Q	12.5J	395	1010	1700	450	TL
LT265/75R16	E/10PR	123/120Q	7.5J	267	810	1550/1400	550	TL
LT285/75R16	E/10PR	126/123Q	8.0J	286	840	1700/1550	550	TL
LT315/75R16	E/10PR	127/124Q	8.5J	313	878	1750/1600	450	TL
LT305/65R17	E/10PR	121/118Q	9.0J	311	828	1450/1320	450	TL
LT265/70R17	E/10PR	121/118Q	8.0J	272	804	1450/1320	550	TL
LT285/70R17	E/10PR	121/118Q	8.5J	292	832	1450/1320	550	TL
LT315/70R17	E/10PR	121/118Q	9.5J	323	874	1450/1320	450	TL
LT245/75R17	E/10PR	121/118Q	7.0J	248	800	1450/1320	550	TL
LT235/80R17	E/10PR	120/117Q	6.5J	235	808	1400/1285	550	TL
LT275/65R18	E/10PR	123/120Q	8.0J	279	815	1550/1400	550	TL

Made in Thailand



M+S

RIM SIZE	15 - 26
SERIES	65 - 80
SPEED RATING	Q




Benefits and Features

- Premium tyres designed for unpaved tough road (Professional Off-Road tyres)
- 3-Plies (available for selected sizes) tyre carcass guarantees outstanding performance on any tough road conditions, especially mud and sand surface
- Robust tread blocks promise excellent traction on unpaved roads



M+S

RIM SIZE	15 - 18
SERIES	65 - 85
SPEED RATING	Q - R



Benefits and Features

- All-season tread design with long tread life
- Double-ply casing construction handles heavy loads at highway speed and delivers outstanding durability
- Double steel belts plies and double full jointless nylon cap plies improve handling stability and durability
- Wide circumferential grooves helps to evacuate water quickly and efficiently

SL309

Size	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
185/75R16C	D/8PR	104/102R	5.0J	184	684	900/850	475	TL
31×10.50R15LT	C/6PR	109 Q	8.5J	268	775	1030	350	TL
LT215/75R15	C/6PR	100/ 97Q	6.0J	216	703	800/730	350	TL
LT235/75R15	C/6PR	104/101Q	6.5J	235	733	900/825	350	TL
LT225/75R16	E/10PR	115/112Q	6.0J	223	744	1215/1120	550	TL
LT245/75R16	E/10PR	120/116Q	7.0J	248	774	1380/1260	550	TL
LT265/75R16	E/10PR	123/120Q	7.5J	267	804	1550/1400	550	TL
LT285/75R16	D/8PR	122/119Q	8.0J	286	834	1500/1360	450	TL
LT215/85R16	E/10PR	115/112Q	6.0J	216	772	1215/1120	550	TL
LT235/85R16	E/10PR	120/116Q	6.5J	235	806	1380/1260	550	TL
LT245/70R17	E/10PR	119/116Q	7.0J	248	776	1360/1250	550	TL
LT265/70R17	E/10PR	121/118Q	8.0J	272	804	1450/1320	550	TL
LT285/70R17	D/8PR	121/118Q	8.5J	292	832	1450/1320	450	TL
LT245/75R17	E/10PR	121/118Q	7.0J	248	800	1450/1320	550	TL
LT235/80R17	E/10PR	120/117Q	6.5J	235	808	1400/1285	550	TL
LT275/65R18	E/10PR	123/120Q	8.0J	279	815	1550/1400	550	TL

Made in Thailand
 Made in China



SC328

Size	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
155R12C	C/6PR	83/81Q	4.5B	157	550	487/462	350	TL
155R12C	D/8PR	88/86Q	4.5B	157	550	560/530	450	TL
155R13C	D/8PR	90/88S	4.5B	157	578	600/560	450	TL
165R13C	D/8PR	94/93Q	4.5B	165	594	670/650	450	TL
175R13C	D/8PR	97/95Q	5.0B	178	609	730/690	450	TL
165/70R13C	C/6PR	88/86S	5.0B	170	562	560/530	375	TL
185R14C	D/8PR	102/100Q	5.5J	188	650	850/800	450	TL
195R14C	D/8PR	106/104Q	5.5J	198	666	950/900	450	TL WSW
205R14C	D/8PR	109/107R	6.0J	208	686	1030/975	450	TL
215R14C	D/8PR	112/110Q	6.0J	218	700	1120/1060	450	TL
165/70R14C	C/6PR	89/87R	5.0J	170	588	580/545	375	TL
205/70R14C	C/6PR	102/100R	6.0J	209	644	850/800	375	TL
215/75R14C	D/8PR	112/110Q	6.0J	216	678	1120/1060	475	TL
185R15C	D/8PR	103/102R	5.5J	188	674	875/850	450	TL
195R15C	D/8PR	106/104R	5.5J	198	690	950/900	450	TL
215R15C	D/8PR	112/110Q	6.0J	218	724	1120/1060	450	TL
205/65R15C	C/6PR	102/100T	6.0J	209	647	850/800	375	TL
195/70R15C	D/8PR	104/102R	6.0J	201	655	900/850	450	TL
205/70R15C	D/8PR	106/104R	6.0J	209	669	950/900	475	TL
215/70R15C	D/8PR	109/107R	6.5J	221	683	1030/975	475	TL
225/70R15C	D/8PR	112/110R	6.5J	228	697	1120/1060	450	TL
175R16C	C/6PR	98/96Q	5.0J	178	684	750/710	375	TL
215/60R16C	D/8PR	108/106T	6.5J	221	664	1000/950	475	TL
195/65R16C	D/8PR	104/102T	6.0J	201	660	900/850	475	TL
205/65R16C	D/8PR	107/105T	6.0J	209	672	975/925	475	TL
215/65R16C	D/8PR	109/107R	6.5J	221	686	1030/975	475	TL
225/65R16C	D/8PR	112/110R	6.5J	228	698	1120/1060	475	TL
235/65R16C	D/8PR	115/113R	7.0J	240	712	1215/1150	475	TL
215/70R16C	C/6PR	108/106T	6.5J	221	708	1000/950	375	TL
215/70R16C	E/10PR	113/111Q	6.5J	221	708	1150/1090	585	TL
175/75R16C	D/8PR	101/99Q	5.0J	177	668	825/775	475	TL
195/75R16C	D/8PR	107/105R	5.5J	196	698	975/925	475	TL
195/75R16C	E/10PR	110/108R	5.5J	196	698	1060/1000	525	TL
205/75R16C	D/8PR	110/108Q	5.5J	203	714	1060/1000	475	TL
205/75R16C	E/10PR	113/111R	5.5J	203	714	1150/1090	525	TL
215/75R16C	D/8PR	113/111Q	6.0J	216	728	1150/1090	475	TL
215/75R16C	E/10PR	116/114R	6.0J	216	728	1250/1180	525	TL

Made in Thailand
 Made in China

M+S

RIM SIZE	12 - 16
SERIES	60 - 75
SPEED RATING	Q - T



Benefits and Features

- Wide four ribs improve miles to tread life
- Zig-zag grooves offers enhanced traction on wet road
- Combination construction of polyester casing and steel belts provide outstanding durability



M+S

RIM SIZE	12 - 16
SERIES	60 - 75
SPEED RATING	Q - T



Benefits and Features

- Valuable commercial light truck tyre for vehicles on paved roads
- 5 rib grooves provides improved handling and comfort
- Polyester tyre casing with steel belts for good durability

H188

Size	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
155R12C	C/6PR	83/81Q	4.5B	157	550	487/462	350	TL
155R12C	D/8PR	88/86Q	4.5B	157	550	560/530	450	TL
155R13C	D/8PR	90/88S	4.5B	157	578	600/560	450	TL
165R13C	C/6PR	91/89S	4.5B	167	596	615/580	375	TL
165/70R13C	C/6PR	88/86S	5.0J	170	562	560/530	375	TL
185R14C	D/8PR	102/100R	5.5J	188	650	850/800	450	TL WSW
195R14C	D/8PR	106/104Q	5.5J	198	666	950/900	450	TL WSW
175/70R14C	C/6PR	95/93S	5.0J	177	602	690/650	375	TL
195R15C	D/8PR	106/104R	5.5J	198	690	950/900	450	TL WSW
205/65R15C	C/6PR	102/100T	6.0J	209	647	850/800	375	TL
215/65R15C	C/6PR	104/102T	6.5J	221	661	900/850	375	TL
195/70R15C	D/8PR	104/102R	6.0J	201	655	900/850	450	TL
205/70R15C	D/8PR	106/104R	6.0J	209	669	950/900	475	TL
215/70R15C	D/8PR	109/107R	6.5J	221	683	1030/975	475	TL
225/70R15C	D/8PR	112/110R	6.5J	228	697	1120/1060	450	TL
195/60R16C	C/6PR	99/97H	6.0J	201	640	775/730	375	TL
215/60R16C	D/8PR	108/106T	6.5J	221	664	1000/950	475	TL
195/65R16C	D/8PR	104/102T	6.0J	201	660	900/850	475	TL
205/65R16C	D/8PR	107/105T	6.0J	209	672	975/925	475	TL
215/65R16C	D/8PR	109/107T	6.5J	221	686	1030/975	475	TL
225/65R16C	D/8PR	112/110T	6.5J	228	698	1120/1060	475	TL
235/65R16C	D/8PR	115/113R	7.0J	240	712	1215/1150	475	TL
185/75R16C	D/8PR	104/102R	5.0J	184	684	900/850	475	TL
195/75R16C	D/8PR	107/105R	5.5J	196	698	975/925	475	TL
205/75R16C	D/8PR	110/108Q	5.5J	203	714	1060/1000	475	TL
215/75R16C	D/8PR	113/111Q	6.0J	216	728	1150/1090	475	TL
225/75R16C	E/10PR	118/116R	6.0J	223	744	1320/1250	525	TL

• Made in China



SC326

Size	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
185R14C	D/8PR	102/100R	5.5J	188	650	850/800	450	TL
195R14C	D/8PR	106/104Q	5.5J	198	666	950/900	450	TL
205R14C	D/8PR	109/107Q	6.0J	208	686	1030/975	450	TL
215R14C	D/8PR	112/110Q	6.0J	218	700	1120/1060	450	TL
215R15C	D/8PR	112/110Q	6.0J	218	724	1120/1060	450	TL
205/70R15C	D/8PR	106/104R	6.0J	209	669	950/900	475	TL
215/70R15C	D/8PR	109/107R	6.5J	221	683	1030/975	475	TL
225/75R15C	D/8PR	116/114Q	6.0J	223	719	1250/1180	475	TL
215/65R16C	D/8PR	109/107R	6.5J	221	686	1030/975	475	TL
215/70R16C	C/6PR	108/106T	6.5J	221	708	1000/950	375	TL

• Made in Thailand



M+S

RIM SIZE	14 - 16
SERIES	65 - 75
SPEED RATING	Q - T



Benefits and Features

- Balanced pattern arrangement for increased traction
- Latest profile design ensure longer tyre life
- Improved casing structure provides outstanding durability



M+S

RIM SIZE	15 - 16
SERIES	-
SPEED RATING	N



Benefits and Features

- Five rib design for improved handling and wet traction
- Combination of polyester casing and steel belts increases durability
- Wide tread width and low-heating compound ensure longer tyre life

ST303

Size	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
6.50R15LT	E/10PR	107/105N	5.5F	180	730	975/925	560	TT/TL
7.00R15LT	E/10PR	110/106N	5.5F	200	750	1060/950	560	TT/TL
6.50R16LT	E/10PR	108/107N	5.5F	185	750	1000/975	560	TT/TL
7.00R16LT	F/12PR	117/116N	5.5F	200	775	1285/1250	670	TT/TL

☛ Made in China



ST313

Size	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
6.50R15LT	E/10PR	107/105N	5.5F	180	730	975/925	560	TT/TL
7.00R15LT	E/10PR	110/106N	5.5F	200	750	1060/950	560	TT/TL
6.50R16LT	E/10PR	108/107N	5.5F	185	750	1000/975	560	TT/TL
7.00R16LT	F/12PR	117/116N	5.5F	200	775	1285/1250	670	TT/TL
7.00R16LT	F/12PR	117/116N	5.5F	200	775	1285/1250	670	TT/TL
7.50R16LT	G/14PR	122/121L	6.0G	220	808	1500/1450	740	TT/TL
185/85R16LT	F/12PR	111/109L	5.0J	184	720	1090/1030	600	TL
195/85R16LT	F/12PR	114/112L	5.5J	196	738	1180/1120	600	TL
205/85R16LT	F/12PR	117/115L	5.5J	203	754	1285/1215	600	TL

☛ Made in China



M+S

RIM SIZE	15 - 16
SERIES	85
SPEED RATING	L - N




Benefits and Features

- Applicable for mini-bus, van and commercial light trucks
- Strong sidewall design enables high durability and fights off cuts and abrasion in city roads
- Triply polyester belts plies creates strength bearing heavy loads with superior stability



M+S

RIM SIZE	15 - 18
SERIES	65 - 85
SPEED RATING	L - Q



Benefits and Features

- Bold, off-road attitude combined with exceptional on-road performance
- Staggered center blocks create more biting edges helping improve off-road performance
- Studable for outstanding traction and braking performance on snow and icy roads

CR857+



Size	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
31x10.50R15LT	C/6PR	109Q	8.5J	268	775	1030	350	TL
LT235/75R15	C/6PR	104/101Q	6.5J	235	733	900/825	350	TL
LT225/75R16	E/10PR	115/112Q	6.0J	223	744	1215/1120	550	TL
LT245/75R16	E/10PR	120/116L	7.0J	248	774	1380/1260	550	TL
LT265/75R16	E/10PR	123/120L	7.5J	267	804	1550/1400	550	TL
LT235/85R16	E/10PR	120/116L	6.5J	235	806	1380/1260	550	TL
LT245/70R17	E/10PR	119/116Q	7.0J	248	776	1360/1250	550	TL
LT265/70R17	E/10PR	121/118Q	8.0J	272	804	1450/1320	550	TL
LT245/75R17	E/10PR	121/118Q	7.0J	248	800	1450/1320	550	TL
LT275/65R18	E/10PR	123/120Q	8.0J	279	815	1550/1400	550	TL

● Made in China

SW658




Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
215/75R15	100T	6.0J	216	703	800	300	TL
225/75R15	102T	6.0J	223	719	850	300	TL
235/75R15	105T	6.5J	235	733	925	300	TL
235/60R16	100H	7.0J	240	688	800	300	TL
215/65R16	98T	6.5J	221	686	750	300	TL
215/70R16	100T	6.5J	221	708	800	300	TL
225/70R16	103T	6.5J	228	722	875	300	TL
235/70R16	106T	7.0J	240	736	950	300	TL
245/70R16	107T	7.0J	248	750	975	300	TL
265/70R16	112T	8.0J	272	778	1120	300	TL
225/45R17	91H	7.5J	225	634	615	300	TL
215/60R17	96T	6.5J	221	690	710	300	TL
225/60R17	99T	6.5J	228	702	775	300	TL
225/65R17	102T	6.5J	228	724	850	300	TL
235/65R17	104T	7.0J	240	738	900	300	TL
245/65R17	107T	7.0J	248	750	975	300	TL
265/65R17	112T	8.0J	272	776	1120	300	TL
265/70R17	115T	8.0J	272	804	1215	300	TL
235/55R18 XL	104H	7.5J	245	715	900	350	TL
255/55R18 XL	109H	8.0J	265	737	1030	350	TL
225/60R18 XL	104V	6.5J	228	727	900	350	TL
235/60R18 XL	107T	7.0J	240	739	975	350	TL
285/60R18	116T	8.5J	292	799	1250	300	TL
255/50R19 XL	107H	8.0J	265	739	975	350	TL

● Made in China



M+S

RIM SIZE	15 - 19
SERIES	45 - 75
SPEED RATING	T - V



Benefits and Features

- New studless winter tyres for SUV/CUV vehicles promise excellent performance on snow and wet road surface
- Special V-shape pattern with solid center rib guarantees outstanding traction on snow, slush and wet road.
- SILICA TECH compound offers remarkable traction and longer tread life



M+S

RIM SIZE	13 - 20
SERIES	40 - 70
SPEED RATING	T - V



Benefits and Features

- Premium studless winter tyre providing excellent snow, slush and wet traction in cold climates
- Special pattern design to promote aggressive bite in deep snow and wet road conditions
- Superior tread compound keeps rubber flexible for maximum performance in extreme cold temperatures in winter

SW618



Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
155/65R13	73T	4.5J	157	532	365	300	TL
165/65R13	77T	5.0J	170	544	412	300	TL
165/70R13	79T	5.0J	170	562	437	300	TL
175/70R13	82T	5.0J	177	576	475	300	TL
165/60R14	75T	5.0J	170	554	387	300	TL
185/60R14	82T	5.5J	189	578	475	300	TL
155/65R14	75T	4.5B	157	558	387	300	TL
175/65R14	82T	5.0J	177	584	475	300	TL
185/65R14	86T	5.5J	189	596	530	300	TL
165/70R14	81T	5.0J	170	588	462	300	TL
175/70R14	84T	5.0J	177	602	500	300	TL
185/70R14	88T	5.5J	189	616	560	300	TL
195/70R14	91T	6.0J	201	630	615	300	TL
195/50R15	82T	6.0J	201	577	475	300	TL
185/55R15	82T	6.0J	194	585	475	300	TL
195/55R15	85H	6.0J	201	595	515	300	TL
185/60R15	84T	5.5J	189	603	500	300	TL
195/60R15	88T	6.0J	201	615	560	300	TL
185/65R15	88T	5.5J	189	621	560	300	TL
195/65R15	91T	6.0J	201	635	615	300	TL
205/65R15	94T	6.0J	209	647	670	300	TL
205/70R15	96T	6.0J	209	669	710	300	TL
215/70R15	98T	6.5J	221	683	750	300	TL
195/55R16 XL	91V	6.0J	201	620	615	350	TL
205/55R16	91H	6.5J	214	632	615	300	TL
215/55R16	93T	7.0J	226	642	650	300	TL
225/55R16	95T	7.0J	233	654	690	300	TL
195/60R16	89T	6.0J	201	640	580	300	TL
205/60R16	92T	6.0J	209	652	630	300	TL
215/60R16	95T	6.5J	221	664	690	300	TL
225/60R16	98T	6.5J	228	676	750	300	TL
205/65R16	95T	6.0J	209	672	690	300	TL
215/65R16	98T	6.5J	221	686	750	300	TL
225/65R16	100T	6.5J	228	698	800	300	TL
215/45R17 XL	91V	7.0J	213	626	615	350	TL
235/45R17 XL	97T	8.0J	236	644	730	350	TL
215/50R17 XL	95H	7.0J	226	648	690	350	TL
225/50R17	94T	7.0J	233	658	670	300	TL
235/50R17 XL	100H	7.5J	245	668	800	350	TL
215/55R17	94T	7.0J	226	668	670	300	TL
225/55R17 XL	101H	7.0J	233	680	825	350	TL
235/55R17	99T	7.5J	245	690	775	300	TL
225/60R17	99T	6.5J	228	702	775	300	TL
225/65R17	102T	6.5J	228	724	850	300	TL
235/65R17	104T	7.0J	240	738	900	300	TL
235/40R18 XL	95V	8.5J	241	645	690	350	TL
225/45R18 XL	95H	7.5J	225	659	690	350	TL
235/45R18 XL	98T	8.0J	236	669	750	350	TL
245/45R18 XL	100T	8.0J	243	677	800	350	TL
235/50R18 XL	101T	7.5J	245	693	825	350	TL
245/50R18 XL	104T	7.5J	253	703	900	350	TL
215/55R18 XL	99H	7.0J	226	693	775	350	TL
225/55R18	98H	7.0J	233	705	750	300	TL
235/55R18 XL	104T	7.5J	245	715	900	350	TL
245/60R18	105H	7.0J	248	751	925	300	TL
235/50R19	99H	7.5J	245	719	775	300	TL
235/55R19 XL	105H	7.5J	245	741	925	350	TL
255/55R19 XL	111H	8.0J	265	763	1090	350	TL
275/30R20 XL	97H	9.5J	278	674	730	350	TL
275/45R20 XL	110H	9.0J	273	756	1060	350	TL
255/50R20 XL	109H	8.0J	265	764	1030	350	TL

● Made in China

Zuper Snow Z-507



Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
215/45R16	90V	7.0J	227	595	600	350	TL
205/55R16	91V	6.5J	214	632	615	300	TL
215/55R16 XL	97H	7.0J	226	642	730	350	TL
225/55R16 XL	99V	7.0J	233	654	775	350	TL
205/60R16	92H	6.0J	209	652	630	300	TL
215/60R16 XL	99H	6.5J	221	664	775	350	TL
225/60R16	98H	6.5J	228	676	750	300	TL
215/65R16	98H	6.5J	221	686	750	300	TL
215/45R17 XL	91V	7.0J	213	626	615	350	TL
225/45R17 XL	94V	7.5J	225	634	670	350	TL
235/45R17 XL	97V	8.0J	236	644	730	350	TL
245/45R17 XL	99V	8.0J	257	646.8	775	350	TL
205/50R17 XL	93V	8.0J	214	638	650	350	TL
215/50R17 XL	95V	7.0J	236	642.8	690	350	TL
225/50R17 XL	98V	7.0J	233	658	750	350	TL
215/55R17 XL	98V	7.0J	236	662.8	750	350	TL
225/55R17 XL	101V	7.0J	233	680	825	350	TL
235/55R17 XL	103V	7.5J	255	684.8	875	350	TL
215/60R17 XL	100V	6.5J	229	685.6	800	350	TL
225/60R17 XL	103V	6.5J	236	697.6	875	350	TL
225/40R18 XL	92V	8.0J	230	637	630	350	TL
235/40R18 XL	95V	8.5J	248	640.2	690	350	TL
245/40R18 XL	97V	8.5J	260	648.2	730	350	TL
255/40R18 XL	99V	9.0J	267	656.2	775	350	TL
225/45R18 XL	95V	7.5J	225	659	690	350	TL
235/45R18 XL	98V	8.0J	236	669	750	350	TL
245/45R18 XL	100V	8.0J	243	677	800	350	TL
255/45R18 XL	103V	8.5J	269	682.2	875	350	TL
225/50R18 XL	99V	7.0J	243	678.2	775	350	TL
235/50R18 XL	101V	7.5J	255	688.2	825	350	TL
245/50R18 XL	104V	7.5J	265	698.2	900	350	TL
215/55R18 XL	99V	7.0J	236	688.2	775	350	TL
225/55R18 XL	102V	7.0J	243	700.2	850	350	TL
225/60R18 XL	104V	7.0J	236	723	900	350	TL
225/35R19 XL	88V	8.0J	230	641	560	350	TL
255/35R19 XL	96V	9.0J	278	654.6	710	350	TL
225/40R19 XL	93V	8.0J	237	657.6	650	350	TL
235/40R19 XL	96V	8.5J	248	665.6	710	350	TL
245/40R19 XL	98V	8.5J	260	673.6	750	350	TL
255/40R19 XL	100V	9.0J	267	681.6	800	350	TL
275/40R19 XL	105V	9.5J	285	697.6	925	350	TL
235/45R19 XL	99V	8.0J	236	695	775	350	TL
245/45R19 XL	102V	8.0J	243	703	850	350	TL
235/50R19 XL	103V	7.5J	255	713.6	875	350	TL
235/55R19 XL	105V	7.5J	255	735.6	925	350	TL

● Made in China

M+S

RIM SIZE	16 - 19
SERIES	35 - 65
SPEED RATING	H - V



Benefits and Features

- Asymmetric pattern design provides superior handling on snow surface
- Optimised lateral groove angle offers strong snow performance
- Special zigzag traction sipes improves traction and braking performance on snow roads



M+S

RIM SIZE	13 - 20
SERIES	35 - 80
SPEED RATING	Q - V



Benefits and Features

V-shaped tread design works with high-drainage groove to drain snow, slush and water quickly

Optimized direction of sipes maximize the tyre's contact with the road surface and delivers outstanding traction and control in all winter driving conditions

Special winter tread compound offers performance driving

SW608



Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
155/70R13	75T	4.5B	157	548	387	300	TL
165/70R13	79T	5.0B	170	562	437	300	TL
175/70R13	82T	5.0B	177	576	475	350	TL
155/80R13	79T	4.5B	157	578	437	300	TL
185/60R14	82H	5.5J	189	578	475	300	TL
195/60R14	86H	6.0J	201	590	530	300	TL
155/65R14	75T	4.5B	157	558	387	300	TL
175/65R14	82H	5.0J	177	584	475	300	TL
185/65R14	86H	5.5J	189	596	530	350	TL
165/70R14	81T	5.0J	170	588	462	300	TL
175/70R14	84T	5.0J	177	602	500	300	TL
185/70R14	88T	5.5J	189	616	560	300	TL
195/70R14	91T	6.0J	201	630	615	300	TL
185/55R15 XL	86H/V	6.0J	194	585	530	350	TL
195/55R15 XL	89H	6.0J	201	595	580	350	TL
185/60R15 XL	88H	5.5J	189	603	560	350	TL
195/60R15	88H	6.0J	201	615	560	300	TL
175/65R15	84T	5.0J	177	609	500	300	TL
185/65R15	88H	5.5J	189	621	560	300	TL
195/65R15	91H	6.0J	201	635	615	300	TL
205/65R15	94H	6.0J	209	647	670	300	TL
215/70R15	98H	6.5J	221	683	750	300	TL
195/50R16 XL	88H	6.0J	201	602	560	350	TL
225/50R16 XL	96V	7.0J	233	632	710	350	TL
195/55R16	87H	6.0J	201	620	545	300	TL
205/55R16	91H	6.5J	214	632	615	300	TL
215/55R16 XL	97H	7.0J	226	642	730	350	TL
225/55R16 XL	99H	7.0J	233	654	775	350	TL
205/60R16	92H	6.0J	209	652	630	300	TL
215/60R16 XL	99H	6.5J	221	664	775	350	TL
225/60R16	98H	6.5J	228	676	750	300	TL
215/65R16	98H	6.5J	221	686	750	300	TL
205/40R17 XL	84V	7.5J	212	596	500	350	TL
215/40R17 XL	87V	7.5J	218	604	545	350	TL
245/40R17 XL	95V	8.5J	248	628	690	350	TL
205/45R17 XL	88V	7.0J	206	616	560	350	TL
215/45R17 XL	91V	7.0J	213	626	615	350	TL
225/45R17 XL	94V	7.5J	225	634	670	350	TL
235/45R17 XL	97H	8.0J	236	644	730	350	TL
245/45R17 XL	99V	8.0J	243	652	775	350	TL
205/50R17 XL	93H	6.5J	214	638	650	350	TL
215/50R17 XL	95V	7.0J	226	648	690	350	TL
225/50R17 XL	98H	7.0J	233	658	750	350	TL
215/55R17 XL	98V	7.0J	226	668	750	350	TL
225/55R17 XL	101V	7.0J	233	680	825	350	TL
235/55R17 XL	103V	7.5J	245	690	875	350	TL
215/60R17	96H	6.5J	221	690	710	300	TL
225/60R17	99H	6.5J	228	702	775	300	TL
235/65R17 XL	108H	7.0J	240	738	1000	350	TL
225/40R18 XL	92V	8.0J	230	637	630	350	TL
235/40R18 XL	95V	8.5J	241	645	690	350	TL
245/40R18 XL	97V	8.5J	248	653	730	350	TL
225/45R18 XL	95V	7.5J	225	659	690	350	TL
235/45R18 XL	98V	8.0J	236	669	750	350	TL
245/45R18 XL	100V	8.0J	243	677	800	350	TL
225/50R18 XL	99V	7.0J	233	683	775	350	TL
235/50R18 XL	101V	7.5J	245	693	825	350	TL
245/50R18 XL	104V	7.5J	253	703	900	350	TL
225/60R18 XL	104V	6.5J	228	727	900	350	TL
225/35R19 XL	88V	8.0J	230	641	560	350	TL
235/45R19 XL	99V	8.0J	236	695	775	350	TL
245/45R19 XL	102V	8.0J	243	703	850	350	TL
245/30R20 XL	90V	8.5J	248	656	600	350	TL

Size	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
185R14C	D/8PR	102/100Q	5.5J	188	650	850/800	450	TL
195/70R15C	D/8PR	104/102R	6.0J	201	655	900/850	450	TL

● Made in China

SW612



Size	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
6.50R16	E/10PR	108/107N	5.5F	185	750	1000/975	560	TL
7.00R16	F/12PR	117/116N	5.5F	200	775	1258/1250	670	TL
155R12C	D/8PR	88/86Q	4.5B	157	550	560/530	450	TL
155R13C	C/6PR	85/83Q	4.5J	157	578	515/487	350	TL
165R13C	C/6PR	91/89Q	4.5B	165	594	615/580	450	TL
175R13C	D/8PR	97/95Q	5.0B	177	610	730/690	450	TL
185R14C	D/8PR	102/100R	5.5J	188	650	850/800	450	TL
175/70R14C	C/6PR	95/93Q	5.0J	177	602	690/650	375	TL
195R15C	D/8PR	106/104R	5.5J	196	693	950/900	450	TL
205/65R15C	C/6PR	102/100T	6.0J	209	647	850/800	375	TL
195/70R15C	D/8PR	104/102R	6.0J	201	655	900/850	450	TL
205/70R15C	D/8PR	106/104R	6.0J	209	669	950/900	450	TL
215/70R15C	D/8PR	109/107R	6.5J	221	683	1030/975	450	TL
225/70R15C	D/8PR	112/110R	6.5J	228	697	1120/1060	450	TL
195/60R16C	C/6PR	99/97T	6.0J	201	640	775/730	375	TL
195/65R16C	D/8PR	104/102T	6.0J	201	660	900/850	475	TL
205/65R16C	D/8PR	107/105T	6.0J	209	672	975/925	475	TL
215/65R16C	D/8PR	109/107R	6.5J	221	686	1030/975	475	TL
225/65R16C	D/8PR	112/110R	6.5J	228	698	1120/1060	475	TL
235/65R16C	D/8PR	115/113R	7.0J	240	712	1215/1150	475	TL
185/75R16C	D/8PR	104/102Q	5.0J	184	684	900/850	475	TL
195/75R16C	D/8PR	107/105R	5.5J	196	698	975/925	475	TL
205/75R16C	D/8PR	110/108Q	5.5J	203	714	1060/1000	475	TL
215/75R16C	D/8PR	113/111Q	6.0J	216	728	1150/1090	475	TL
225/75R16C	E/10PR	118/116Q	6.0J	223	744	1320/1250	525	TL

● Made in China



M+S

RIM SIZE	12 - 16
SERIES	60 - 75
SPEED RATING	N - T



Benefits and Features

All-round winter performance for vans and other commercial vehicles


Remarkable safety through excellent grip, handling and traction in snow, mud and wet surface

Comfortable ride and precise handling with long tread life



M+S

RIM SIZE	14 - 19
SERIES	40 - 75
SPEED RATING	T - H



Benefits and Features

Studdable V-shaped tread design delivers outstanding traction and braking performance on snow and icy roads

Stiff shoulder blocks deliver outstanding cornering stability and enhanced grips

IceMaster Spike Z-506



Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
175/65R14 XL	86T	5.0J	177	584	530	350	TL
185/65R14	86T	5.5J	189	596	530	300	TL
195/50R15	82T	6.0J	201	577	475	300	TL
195/55R15	85T	6.0J	201	595	515	300	TL
195/60R15	88T	6.0J	201	615	560	300	TL
185/65R15 XL	92T	5.5J	189	621	630	350	TL
195/65R15 XL	95T	6.0J	201	635	690	350	TL
205/65R15	94T	6.0J	209	647	670	300	TL
225/75R15	102T	6.0J	223	719	850	300	TL
235/75R15	105T	6.5J	235	733	925	300	TL
205/50R16	87T	6.5J	214	612	545	300	TL
195/55R16	87T	6.0J	201	620	545	300	TL
205/55R16 XL	94T	6.5J	214	632	670	350	TL
215/55R16 XL	97T	7.0J	226	642	730	350	TL
225/55R16	95T	7.0J	233	654	690	300	TL
205/60R16 XL	96T	6.0J	209	652	710	350	TL
215/60R16	95T	6.5J	221	664	690	300	TL
205/65R16	95T	6.0J	209	672	690	300	TL
215/65R16	98T	6.5J	221	686	750	300	TL
225/45R17 XL	94H	7.5J	225	634	670	350	TL
235/45R17 XL	97T	8.0J	236	644	730	350	TL
245/45R17 XL	99T	8.0J	243	652	775	350	TL
225/50R17 XL	98H	7.0J	233	658	750	350	TL
215/55R17 XL	98T	7.0J	226	668	750	350	TL
225/55R17 XL	101T	7.0J	233	680	825	350	TL
215/60R17	96T	6.5J	221	690	710	300	TL
225/65R17	102T	6.5J	228	724	850	300	TL
235/65R17	104T	7.0J	240	738	900	300	TL
225/40R18 XL	92T	8.0J	230	637	630	350	TL
235/40R18 XL	95T	8.5J	241	645	690	350	TL
245/40R18 XL	97T	8.5J	248	653	730	350	TL
235/45R18 XL	98T	8.0J	236	669	750	350	TL
255/50R19 XL	107T	8.0J	265	739	975	350	TL

★ Made in China

SW606




Size	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
185/60R14	82T	5.5J	189	578	475	300	TL
175/65R14	82H	5.0J	177	584	475	300	TL
185/65R14	86T	5.5J	189	596	530	300	TL
185/70R14	88T	5.5J	189	616	560	300	TL
195/70R14	91T	6.0J	201	630	615	300	TL
185/60R15	84T	5.5J	189	603	500	300	TL
195/60R15	88T	6.0J	201	615	560	300	TL
185/65R15	88T	5.5J	189	621	560	300	TL
195/65R15	91T	6.0J	201	635	615	300	TL
205/65R15	94T	6.0J	209	647	670	300	TL
215/70R15	98T	6.5J	221	683	750	300	TL
205/55R16	91T	6.5J	214	632	615	300	TL
205/60R16	92T	6.0J	209	652	630	300	TL
215/60R16	95T	6.5J	221	664	690	300	TL
225/60R16	98T	6.5J	228	676	750	300	TL
215/65R16	98T	6.5J	221	686	750	300	TL
215/70R16	100T	6.5J	221	708	800	300	TL
225/70R16	103T	6.5J	228	722	875	300	TL
235/70R16	106T	7.0J	240	736	950	300	TL
245/70R16	107T	7.0J	248	750	975	300	TL
265/70R16	112T	8.0J	272	778	1120	300	TL
215/45R17 XL	91H	7.0J	213	626	615	350	TL
225/45R17 XL	94H	7.5J	225	634	670	350	TL
205/50R17 XL	93H	6.5J	214	638	650	350	TL
215/50R17 XL	95H	7.0J	226	648	690	350	TL
225/50R17 XL	98H	7.0J	233	658	750	350	TL
225/55R17 XL	101H	7.0J	233	680	825	350	TL
225/60R17	99T	6.5J	228	702	775	300	TL
225/65R17	102T	6.5J	228	724	850	300	TL
235/65R17	104T	7.0J	240	738	900	300	TL
245/65R17	107T	7.0J	248	750	975	300	TL
245/70R17	110T	7.0J	248	776	1060	300	TL
265/70R17	115T	8.0J	272	804	1215	300	TL
225/40R18 XL	92H	8.0J	230	637	630	350	TL
225/50R18 XL	99H	7.0J	233	683	775	350	TL
235/50R18 XL	101H	7.5J	245	693	825	350	TL
215/55R18 XL	99H	7.0J	226	693	775	350	TL
225/55R18 XL	102H	7.0J	233	705	850	350	TL
225/60R18 XL	104H	6.5J	228	727	900	350	TL
235/60R18 XL	107H	7.0J	240	739	975	350	TL
245/60R18	105T	7.0J	248	751	925	300	TL
275/65R18	116T	8.0J	279	815	1250	300	TL
275/55R20 XL	117H	8.5J	284	810	1285	350	TL
275/60R20	115T	8.0J	279	838	1215	300	TL

Size	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	TT/TL
195/70R15C	D/8PR	104/102R	6.0J	201	655	900/850	450	TL
225/70R15C	D/8PR	112/110R	6.5J	228	697	1120/1060	450	TL
185/75R16C	D/8PR	104/102R	5.0J	184	684	900/850	475	TL
LT225/75R16	E/10PR	115/112Q	6.0J	220	739	1215/1120	550	TL
LT245/75R16	E/10PR	120/116Q	7.0J	245	771	1380/1260	550	TL
LT265/75R16	E/10PR	123/120Q	7.5J	264	802	1550/1400	550	TL
LT235/85R16	E/10PR	120/116Q	6.5J	224	801	1380/1260	550	TL
LT245/70R17	E/10PR	119/116Q	7.0J	245	771	1360/1250	550	TL
LT265/70R17	E/10PR	121/118Q	8.0J	269	799	1450/1320	550	TL
LT285/70R17	E/10PR	121/118Q	8.5J	288	826	1450/1320	550	TL
LT245/75R17	E/10PR	121/118Q	7.0J	245	795	1450/1320	550	TL
LT235/80R17	E/10PR	120/117Q	6.5J	232	802	1400/1285	550	TL
LT275/65R18	E/10PR	123/120Q	8.0J	282	810	1550/1400	550	TL
LT275/70R18	E/10PR	125/122Q	8.0J	270	837	1650/1500	550	TL

★ Made in China

M+S

RIM SIZE	14 - 20
SERIES	40 - 80
SPEED RATING	Q - H




Benefits and Features

Studdable V-shaped tread design delivers outstanding traction and braking performance on snow and icy roads

Stiff shoulder blocks deliver outstanding cornering stability and enhanced grips


TYRE SIZE KNOWLEDGE

225/40ZR18 92W

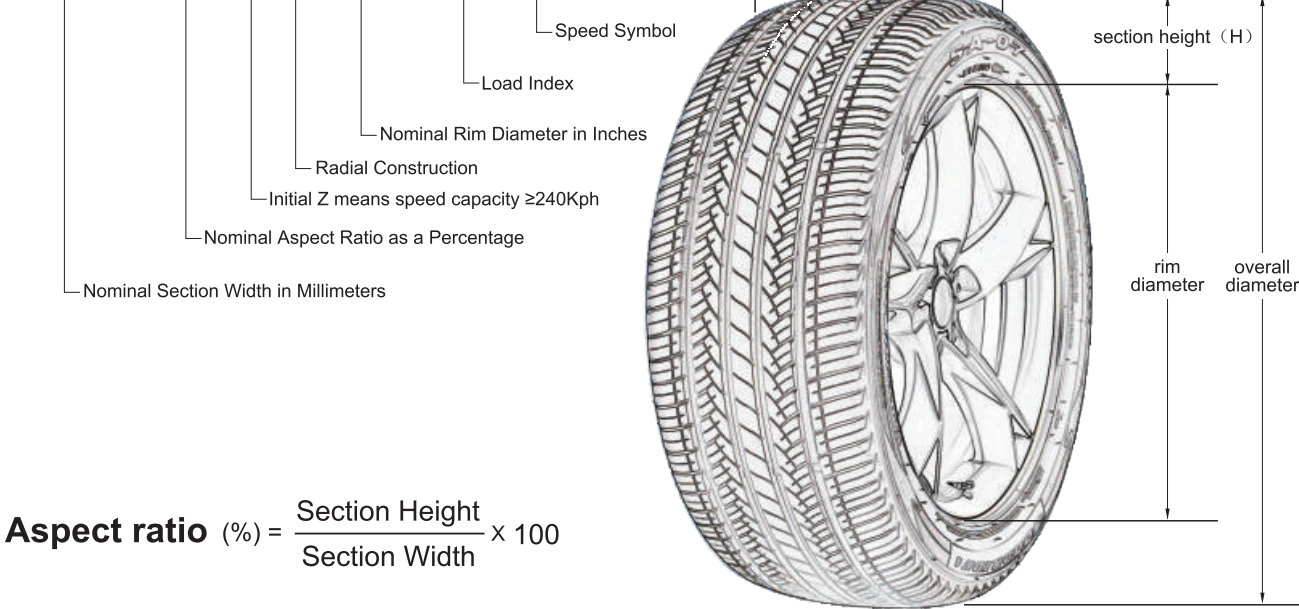

Aspect ratio (%) = $\frac{\text{Section Height}}{\text{Section Width}} \times 100$

SIDEWALL INSTRUCTION:

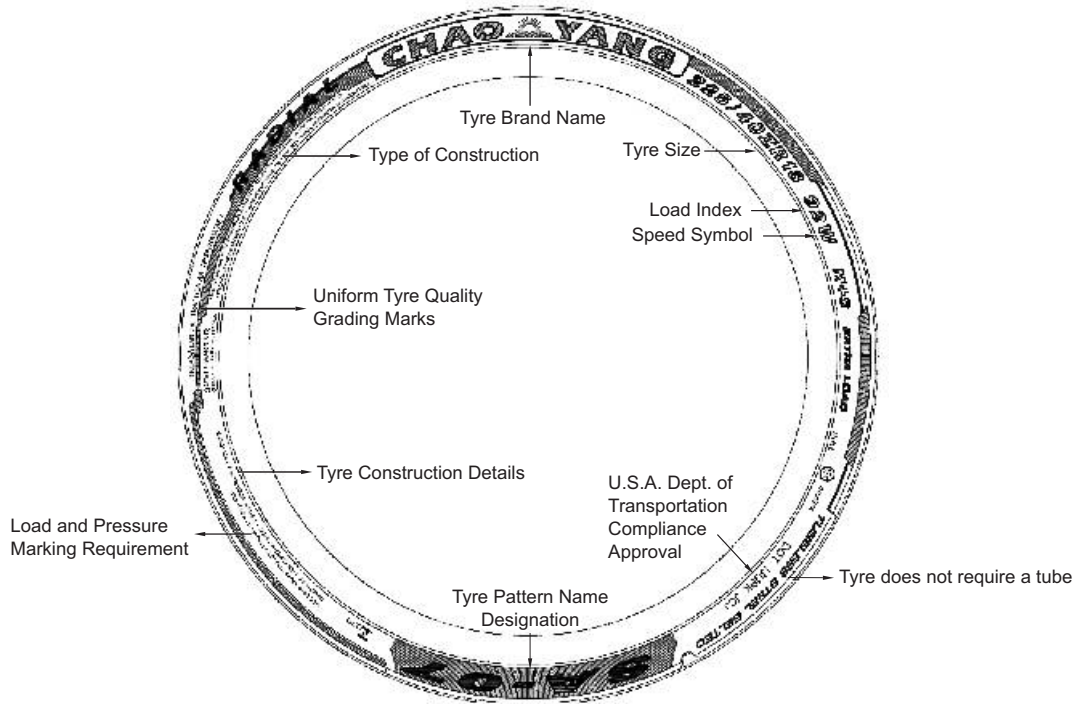

OTHER MARKINGS:

P - as part of the tyre size designation (e.g., P205/65R15) used to indicate tyres intended for services on passenger cars.
LT - as part of the size designation (e.g., LT235/75R15) used to indicate the tyres are intended for light truck vehicles.
M&S - letters used to indicate a tyre suitable for Mud and Snow and/or All Season usage.
XL - as part of the size designation (e.g., P235/75R16 XL) used to indicate the tyre can carry more loads as the maximum inflation pressure and load are greater than a standard load version. (Also could be called REINFORCED or RF).
ZR - as part of the tyre size designation (e.g. 225/45ZR17 XL) used to indicate the tyre has a maximum speed over 240 kilometer per hour.

SPEED RATING

The speed symbol refers to the maximum speed capabilities of the tyre. It is only valid for tyres that are properly inflated and loaded within their assigned load index.

Speed Rating	L	N	P	Q	R	S	T	U	H	V	W	Y	ZR
Max. Kph. (Kilometer/hour)	120	140	150	160	170	180	190	200	210	240	270	300	≥240

LOAD INDEX

The load index is the maximum load-carrying capacity of a tyre under a specific condition.

Load Index	KG	LBS	Load Index	KG	LBS	Load Index	KG	LBS	Load Index	KG	LBS	Load Index	KG	LBS
50	190	420	70	335	740	90	600	1320	110	1060	2340	130	1900	4180
51	195	430	71	345	760	91	615	1360	111	1090	2400	131	1950	4300
52	200	440	72	355	785	92	630	1390	112	1120	2470	132	2000	4400
53	206	455	73	365	805	93	650	1430	113	1150	2540	133	2060	4540
54	212	465	74	375	825	94	670	1480	114	1180	2600	134	2120	4680
55	218	480	75	387	855	95	690	1520	115	1215	2680	135	2180	4800
56	224	495	76	400	880	96	710	1570	116	1250	2760	136	2240	4940
57	230	505	77	412	910	97	730	1610	117	1285	2830	137	2300	5080
58	236	520	78	425	935	98	750	1650	118	1320	2910	138	2360	5200
59	243	535	79	437	965	99	775	1710	119	1360	3000	139	2430	5360
60	250	550	80	450	990	100	800	1760	120	1400	3080	140	2500	5520
61	257	565	81	462	1020	101	825	1820	121	1450	3200	141	2575	5680
62	265	585	82	475	1050	102	850	1870	122	1500	3300	142	2650	5840
63	272	600	83	487	1070	103	875	1930	123	1550	3420	143	2725	6000
64	280	615	84	500	1100	104	900	1980	124	1600	3520	144	2800	6150
65	290	640	85	515	1140	105	925	2040	125	1650	3640	145	2900	6400
66	300	660	86	530	1170	106	950	2090	126	1700	3740	146	3000	6600
67	307	675	87	545	1200	107	975	2150	127	1750	3860	147	3075	6800
68	315	695	88	560	1230	108	1000	2200	128	1800	3960	148	3150	6950
69	325	715	89	580	1280	109	1030	2270	129	1850	4080	149	3250	7150

TYRE UPGRADE


"Tyre Upgrade" means: increase of rim diameter without changing of tyre overall diameter, the trend in development of low aspect ratio is called upgrade.

INCREASE OF SPORTY PERFORMANCE

The tyre response will be more sensitive when you turn the steering wheel that the flex of tyre will be reduced, and the performance of steering and handling stability will be better, especially under medium and high speed driving.

ENHANCEMENT OF BRAKING ABILITY

The braking stability will be improved due to the decrease of tyre flex when you brake.

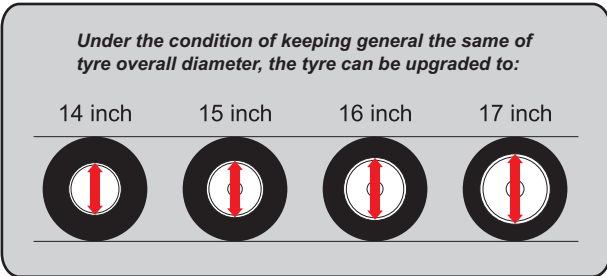

Please refer to the clarifications set forth below to upgrade the tyre:

- Without any particular reason, please do not change the overall diameter of tyre easily. The alternation of tyre overall diameter will cause misreading of speedometer or mutual interference between tyre and other parts of vehicle.
- Please determine the width of tyre in accordance with the specific width of vehicle. If the width of the entire tyre is increased overly, it will cause mutual interference between tyre and other parts of vehicle, even heading out of the tyre from bodywork which will initiate danger.
- Notice the load index of vehicle when you upgrade the tyre. There is rule to the weight which the tyre can bear (load index) for each size. Please refer to the load index when you chose the proper size.

TYRE ROTATION AND INFLATION


TYRE ROTATION:

The purpose for rotating tyres is to achieve a more uniform wear for all tyres on a vehicle. Before rotating tyres, determine the cause of any unusual wear and correct any misalignment, imbalance, or other mechanical problems.

Otherwise it will cause: 1. Ride disturbing; 2. More noise; 3. Poor ride comfort; 4. Shorter of life span.

Note: it is suggested that tyres should be transposed as soon as the phenomena above mentioned are detected (especially the two front wheels).

The tyre transposition patterns are acceptable below. Please refer to your vehicle owner's manual regarding tyre transposition advice.

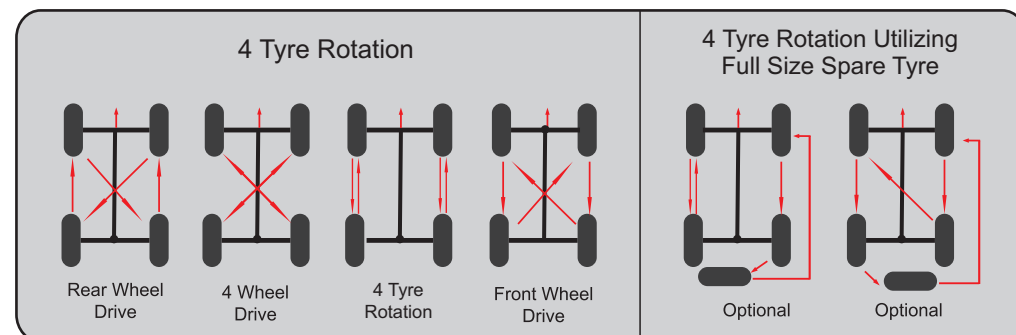

TYRE INFLATION:

One of the most important aspects of tyre maintenance is proper inflation.

Sufficient inflation is needed to carry the load and avoid damage. Driving with improper inflation (particularly grossly under inflated or over inflated tyres) is dangerous and can cause critical damage or sudden failure of the tyre(s). Proper inflation should be maintained and check on at least weekly bases and before long distance drives.

Proper inflation should be maintained and checked at least once a week and before a long distance drive.

It is also advisable to take into account axle load and driving conditions when setting inflation pressure. Compensation for heavier loads can be made by increasing inflation pressure, but do not exceed maximum inflation for the tyre or maximum axle load.

In the space of just one month, a tyre can lose 10 pounds of air pressure.

It is important to check your air pressure regularly, to make sure your tyres are neither under nor over inflated.

Under-inflation

Is the worst enemy your tyre can have. It causes increased treadwear on the outside edges (or shoulders) of the tyre. It also generates excessive heat, which reduces tyre durability. Finally it reduces your fuel economy by increasing rolling resistance-soft tyres make your vehicle work harder.

Over-inflation

Is also detrimental to the tyre. Too much air pressure causes the center of the tread to bear the majority of the truck's weight, which leads to faster deterioration and uneven wear. Any kind of uneven wear will shorten the lifespan of your tyres.


MOUNTING PROCEDURE

There is extreme danger in attempting to install a tyre of one rim diameter on a rim of a different rim diameter.

Always replace a tyre on a rim with another tyre of exactly the same diameter tyre designation and suffix letters.

For example, a 16" tyre goes with a 16" rim. Never mount a 16" size diameter tyre on a 16.5" rim. While it is possible to pass a 16" diameter tyre over the lip or flange of a 16.5" size diameter rim, it cannot be inflated enough to position itself against the rim flange. If an attempt is made to seat the tyre bead by inflating, the tyre bead may break with explosive force and could cause serious bodily injury or death.

Rims of different diameters and tapers cannot be interchanged. The top right diagrams illustrate the difference between rims of two different tapers and diameters.

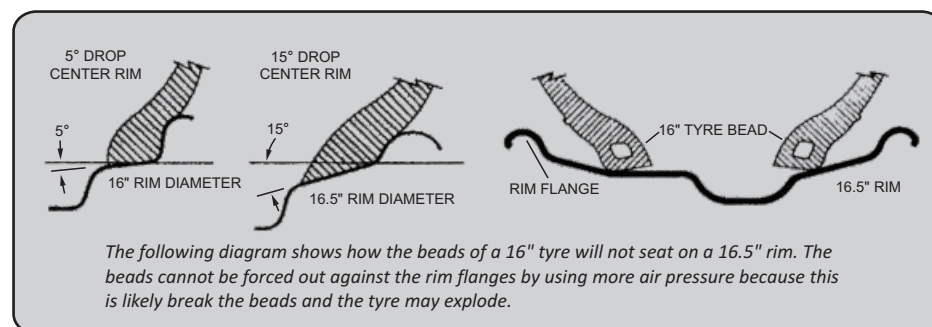

FOR YOUR SAFETY AND COMFORT

Any tyre, no matter how well constructed, may fail in use as a result of punctures, impact damage, improper inflation or other conditions resulting from use.

Tyre failure may create risk of property damage or personal injury. To reduce the risk of tyre failure and for your safety and comfort, we strongly recommend the following:

- Never mount a tyre on a rim that is damaged or which has been repaired by welding or brazing.
- Never inflate beyond 275 kPa (2.75bar, 40psi) to seat beads.
- Tyre inflation should be done in a safety cage.
- Do not mix different tyre size designations or construction on the same axle, except for limited use of temporary spare tyres.
- Outer diameter of wheel should be the same as inner diameter of tyre.
- Make sure to follow instructions in the car owner's manual or on the vehicle tyre information placard in the car to maintain proper tyre pressure (Particularly driving on highway and/or when carrying heavy loads).
- Never bleed or reduce air pressure when tyres are hot from driving.
- Over- or under-inflation pressure (including spare tyre) at least once a month and before every long trip.
- Stones, gravel and other outer objects stuck in the tyre treads may damage the tyre. Remove outer objects from the tyre treads.
- Tyre should only be mounted by professionally trained persons.
- Objects in the road such as potholes, glass, metal, rocks, wood debris, curbstones and such, which could damage a tyre should be safely avoided.
- To preserve traffic safety and tyre life, ZC rubber recommends driving safely and avoiding hard acceleration, braking or cornering in unnecessary situations.
- If you feel the car is unstable or feel any unusual noises or vibrations, stop your car in safe place and inspect your tyres. Even if no visible defects are found, drive slowly and ask your dealer to inspect your tyres as soon as possible.
- Winter tyres (studless, stud or snow tyres) should not be mixed with other types of tyres.
- New winter tyre should not be driven over 80km/h for the first 100km.
- When driving on winter roads, sudden starts and quick stops should be avoid and a safe car-to-car driving distance should be maintained.
- When using tyre chains be sure to use the proper size chains and affix with priority to the drive axle.
- Avoid driving with tyre chains for long distance on roads with no packed snow or ice.

Never use a tyre under the following conditions and replace tyres immediately:

- If the tread has worn to the tread wear indicator.
- If breaks in the fabric appear.
- If cords or wires are exposed.

Storage of steel belted radial tyres:

- Keep your tyres away from direct sunlight and locations with high temperature, high moisture, heavy electrical machinery, welders etc.
- Tyres should be preferably stored in a cool, dry, and dark room with controlled environment.

To preserve traffic safety, ZC rubber recommends driving substantially slower under adverse weather or road conditions.

ROUTINE MAINTENANCE

- Each month the tyre pressure should be checked one time at least when the tyre is cool, too much or less of the pressure will cause damage to tyre.
- Please take a 15-minutes break after driving on expressway for two hours.
- Please ensure that there are no nails, metal pieces, glass or other foreign materials.
- Please ensure that there is no damage such as separation, distortion and distinct rusting which will cause air leakage.
- Please transpose the tyres regularly (approximately 5000 km) in accordance with abrasion conditions for the sake of expanding its life span and preventing eccentric wear.
- No tyre brightener.

THE INVENTORY OF STEEL-CORD RADIAL TYRE

The tyre should be placed in dry interior.

Note: In order to ensure the driving safety, we suggest that please decrease the speed while driving under atrocious weather and poor terrain condition.